

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970 as Amended

Instrument
201300004595 OR
Liber Page
544 877

Located in: _____ Corner Code #

- Public Land Survey
T 33N R 5E Corner Code # C-10
T _____ R _____
T _____ R _____
T _____ R _____
- Property Controlling in Section
S _____ T _____ R _____
S _____ T _____ R _____
- Miscellaneous
S _____ T _____ R _____
Property in Sec. S _____ T _____ R _____

201300004595
Filed for Record in
PRESQUE ISLE COUNTY
CATHY I. IDALSKI, REGISTER OF DEEDS
12-10-2013 At 03:49 PM.
LC-REMON 17.00
OR Liber 544 Page 877 - 878

Register of Deeds Stamp & Figure Number

- Lot No. _____, Recorded Plat _____
- Private Claims _____


I, **Travis L. Horrocks**, in a field survey on March 27, 2013, do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and for that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

C-10
SEEDACK

1	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	16	17	18	19	20	21							
7													
8	13	14	15	16	17	18							
9													
10	20	21	22	23	24	25							
11													
12	31	32	33	34	35	36							
13													

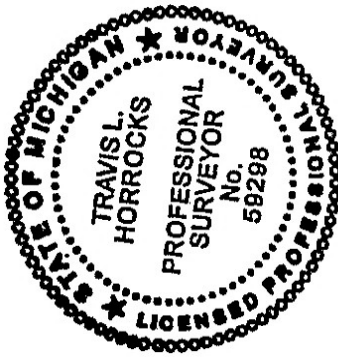

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- C-10
FD. 1/2" ROD & CAP #15410 IN OLD N-S FENCE
17' WEST OF 2 TRACK
N 64° E 32.90' STUMP MOUND
N 64° E 26.81' 10" CEDAR #21559
N 01° W 10.34' 13" CEDAR #21559
S 60° E 39.86' STUMP MOUND
S 30° E 44.26' 10" CEDAR #21559

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- C-10
1/2" ROD & REMON CAP #59298 IN OLD N-S FENCE
17' WEST OF 2 TRACK
N 64° E 26.81' 10" CEDAR #21559 (OW)
N 01° W 10.34' 13" CEDAR #21559 (OW)
S 30° E 44.26' 10" CEDAR #21559 (OW)
N 86° W 26.78' 8" W. BIRCH #59298

Attested by Peer Group
in accordance with P.A. 345
Chairman Norm Chami
Date 9-19-2013

Signed by Travis L. Horrocks
Surveyor's Michigan License No. 59298

WITNESS TAGS & NAILS USED

Date Sept 23 2013