

2138

1994 PRESQUE ISLE COUNTY STATE OF MICHIGAN REMONUMENTATION ON PRESQUE ISLE COUNTY RECORDED

94 SEP 12 AM 10:40

James A. Beck REGISTER OF DEEDS

LIBER 311 PAGE 239

LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970

For corners in Presque Isle (County) Located In: Corner Code #

Table with 2 columns: Description (Public Land Survey, Property Controlling in Section, Miscellaneous, Property in Sec.) and Corner Code # (K-11).

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, James A. Beck, in a field survey on March 16, 1994 do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.


A. Description of original monument and accessories and/or subsequent restoration:

- K-11 1856: Original monumentation in Government Resurvey. Set post at corner of Sections 25, 26, 35, and 36 and referenced: W Pine 12", N63°W 10 Links, S64°E 34 Links
1978: Delmer E. Porter, P.S. 15410, set concrete monument with brass cap where 2" pipe found. (Corner recorded Nov. 29, 1978, Presque Isle County Records). Referenced: N37°W 44.20', S Maple, S26°E 26.00', 4" Balsam, S72°W 51.00', 4" Maple

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- K-11 1994: Found concrete monument with brass cap and three witnesses as recorded by Delmer E. Porter, P.S. 15410 (see above). Witnesses found (as recorded): N37°W 44.20', 5" Maple, S26°E 26.00', 4" Balsam, S72°W 51.00', 4" Maple

Ratified by Peer Group in accordance with P.A. 345 Chairman Delmer E. Porter Date August 27, 1994

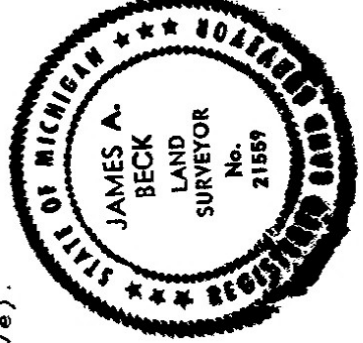

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- K-11 1994: Concrete monument with brass cap 14" deep. Spikes and bolt in hole over monument. Witnesses: N37°W (r) 44.20', (m) 44.10', 5" Maple in large clamp (P.R.)*, S26°E (r) 26.00', (m) 25.80', 12" Balsam (P.R.)*, S72°W (r) 51.00', (m) 50.87', 5" Maple in large clamp (P.R.)*, N61°W 68.15', 5" Jack Pine*, South 33.00', 1/2" Iron Rod
* = Set Tag P.S. 21559
P.R. = Previously Recorded

Signed by [Signature] Date August 25, 1994
Surveyor's Michigan License No. 21559

Grid table with columns A-M and rows 2-13.

2459