

**SURVEY &  
REMONUMENTATION**

2004 CHEBOYGAN COUNTY REMONUMENTATION

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970 as Amended

AUG 1 9 2005

SECTION

For corners in

CHEBOYGAN  
(County)

Located In:

T 35N R 2W

C-9

Corner Code #



RECEIVED FOR RECORD  
MARY ELLEN TRYBANI, CLERK/REGISTRAR  
CHEBOYGAN COUNTY, MICHIGAN  
08/09/2005 1:34 55 PM

RECEIPT# 13119, STATION 1  
LAND CORNER RECORDAT

\$14.00

1. Public Land Survey  
 2. Property Controlling S  
 in Section S  
 3. Miscellaneous S  
 Property in Sec. S

Register of Deeds Stamp & File  
Number

4. Lot No. \_\_\_\_\_, Recorded Plat  
 5. Private Claims

I, BRIAN K. FULLFORD, in a field survey on April 19, 2005 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

**NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:

1855 Harvey Mellen  
 Set post  
 S52°30'E 56 links 24" W. Pine  
 N44°E 56 links 24" Y. Pine

2002 LCRC, Liber 3, Pg 182  
 Carl Kiiskila #33981  
 Fnd. 1 1/2" pipe  
 N60°E 13.04' 24" Oak  
 due North 26.89' 5" Maple  
 N50°E 45.53' 6" Balsam  
 N81°W 44.72' 10" Oak  
 S65°W 19.9' Pine stump "NBT"

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Fnd 1 1/2" pipe;  
 N64°E 13.00' 24" Oak  
 N05°W 26.94' 5" Maple  
 N52°W 45.55' 7" Balsam  
 N82°W 44.63 10" Oak  
 S66°W 20.00' stump  
 Fence 6' North - heading East  
 Fence 4' West - heading North


ACCEPTED BY THE CHEBOYGAN  
 COUNTY SURVEY FIELD GROUP  
 AS THE OFFICIAL CORNER UNDER  
 P.A. 345 OF 1990, AS AMENDED, AT  
 A MEETING HELD ON 5-26-05

*Brian K. Fullford*

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-9 Set 5/8" x 36" bar and Cheboygan County Remonumentation cap inside pipe.  
 Position is accepted as a careful and faithful perpetuation of the original corner.

N64°E 13.00' 24" Oak  
 N05°W 26.94' 5" Maple  
 N52°W 45.55' 7" Balsam  
 N82°W 44.63' 10" Oak  
 S66°W 20.00' stump  
 Fence 6' North - heading East  
 Fence 4' West - heading North

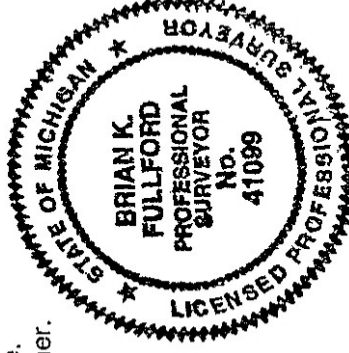

Signed by *Brian K. Fullford*  
 Surveyor's Michigan License No. 41099

Date June 21, 2005

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							