

SURVEY & REMONUMENTATION

2004 CHEBOYGAN COUNTY REMONUMENTATION

AUG 12 2005

SECTION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970 as Amended

For corners in

CHEBOYGAN (County) Located in: Corner Code #



RECEIVED FOR RECORD
MARY ELLEN TRYBAN, CLERK/REGISTRAR
CHEBOYGAN COUNTY, MICHIGAN
08/09/2005 1:34:55 PM

T 35N R 2W D-9

RECEIPT# 13119, STATION 1
\$14.00 LAND CORNER RECORDAT

- 1. Public Land Survey T ___ R ___
- 2. Property Controlling S ___ in Section S ___
- 3. Miscellaneous S ___ Property in Sec. S ___

Register of Deeds Stamp & File Number

- 4. Lot No. _____, Recorded Plat
- 5. Private Claims

I, BRIAN K. FULLFORD, in a field survey on April 10, 2005 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- 1855 Harvey Mellen
Set post
S74°W 4 links 6" Y. Pine
N17°30'E 22 links 6" Y. Pine
- 1994 Liber 003, Pg 15
Michael Trowbridge #27463
Fnd. 0.15' O.D. pipe
AZ 226° 29.56' 6" Pine
AZ 87° 25.08' 8" Poplar
AZ 39° 68.18' 8" Tw. Oak
AZ 147° 85.57' 12" Oak
Due South 35' +/- fence corner


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
Fnd 1 1/4" pipe
S46°W 29.60' 8" Jack Pine; tag #27463
East 24.98' 12" Aspen; tag #27463
S9°W 34.88' fence corner; tag #27463
N42°E 68.07' 10" Oak; tag #27463
S31°E 85.57' 14" Oak; tag #27463

C. Description of monument for corner and accessories established to perpetuate locating the position of the monument
D-9 Set 5/8" x 36" bar and Cheboygan County Remonumentation cap inside pipe.
Position is accepted as a careful and faithful perpetuation of the original corner.

- S46°W 29.60' 8" Jack Pine; tag #27463
- East 24.98' 12" Aspen; tag #27463
- S9°W 34.88' fence corner; tag #27463
- N42°E 68.07' 10" Oak; tag #27463
- S31°E 85.57' 14" Oak; tag #27463

Signed by Brian K. Fullford
Surveyor's Michigan License No. 41099

Date June 21, 2005

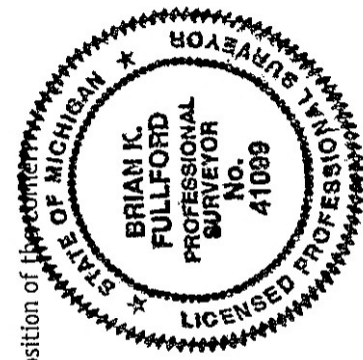

ACCEPTED BY THE CHEBOYGAN COUNTY SURVEY PEER GROUP AS THE OFFICIAL CORNER UNDER P.A. 345 OF 1990. AS AMENDED, AT A MEETING HELD ON 5-26-05
James H. Stanger

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2								
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							