

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970, as Amended

SECTION

RECEIVED FOR RECORD  
MARY ELLEN TRYBAN, CLERK/REGISTER  
CHEBOYGAN COUNTY, MICHIGAN  
09/21/2006 11:28:40 AM

RECEIPT # 10763, STATION 2  
LAND CORNER RECORDAT

CHEBOYGAN (County) Located In: Corner Code #

1. Public Land Survey T 35N R 2W E-10

2. Property Controlling in Section S  
3. Miscellaneous Property in Sec. S

4. Lot No. \_\_\_\_\_, Recorded Plat  
5. Private Claims

I, BRIAN K. FULLFORD, in a field survey on July 19, 2006 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- August 1855 Harvey Mellen  
10" Y. Pine West 2 links  
10" Y. Pine S82°E 32 links
- 1960 Unrecorded DNR  
survey Plan No. R-16-G  
Kenneth Ostling #10068  
DNR survey shows cor.

- December 1960 DNR LCRC  
Set 1" pipe w/ 4" brass cap  
6" J. Pine N56°E 64½ links  
7" J. Pine N38°W 25½ links

- January 1962 LCRC,  
Liber A, Pg 375  
Dean C. DeLaMeter #5778  
1" pipe w/ 4" brass cap  
6" J. Pine N56°E 64½ links  
7" J. Pine N38°W 25½ links

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- Fnd. MDNR Monument  
4" J. Pine S32°E 18.49'  
7" J. Pine S27°W 28.40'  
9" J. Pine N33°W 17.23' Scribed 1/4 & NBT  
6"-10" Twin Oak N67°E 40.82'  
Stump N60°E 42.5' Scribed NBT


ACCEPTED BY THE CHEBOYGAN  
COUNTY SURVEY FEES GROUP  
AS THE OFFICIAL CORNER UNDER  
P.A. 545 OF 1990, AS AMENDED, AT  
A MEETING HELD ON 8-24-06

*Jane A. Boyer*

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

E-10 MDNR Monument. Position is accepted as a careful and faithful perpetuation of the original corner.

- 4" J. Pine S32°E 18.49'  
7" J. Pine S27°W 28.40'  
9" J. Pine N33°W 17.23' Scribed 1/4 & NBT  
6"-10" Twin Oak N67°E 40.82'

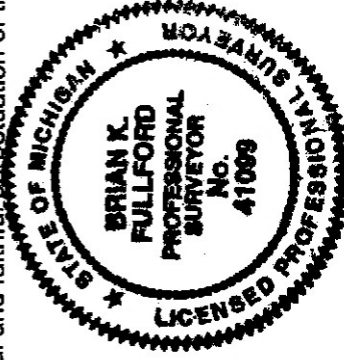

Signed by *Brian K. Fullford*  
Surveyor's Michigan License No. 41099

Date September 11, 2006

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													