2000 Alcona County Remonumentation

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

Alcona County
Remonumentation
Liber 2 Page 87

Filed for Record in
ALCONA COUNTY MICHIGAN
DORIS A GAUTHIER
On 09-20-2000 At 09:54 am.
LAND CORNER 9.00

Register of Deeds Stamp & File Number

For corners in Alcona (County)

	Located In:	Corner Code #
1. Public Land Survey	T 25N R 09E	A-4
	T 25N R 08E	M-4
	T___ R___	
	T___ R___	
2. Property Controlling	S___ T___ R___	
in Section	S___ T___ R___	
3. Miscellaneous	S___ T___ R___	
Property in Sec.	S___ T___ R___	

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

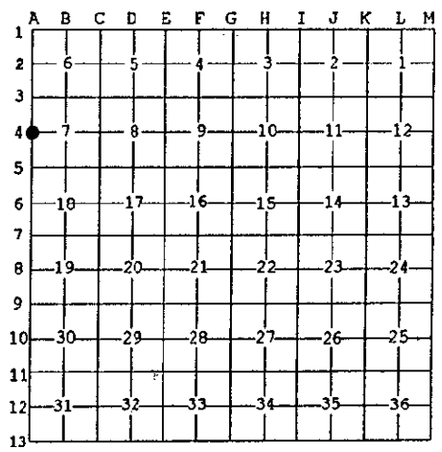

I, Wayne T. Lewis, in a field survey on 3-30-2000, 19___ do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:
1838 - Lewis Clason: Set post and witnessed
1903 - County Surveyor: Found post, no witnesses given
1996 - Northeast Land Surveys (Bill Woods, P.S.): Found 1/2" pipe, no witnesses given

APPROVED LAND CORNER
P A 345 of 1990
ALCONA COUNTY
Date 9-6-2000
County Rep. [signature]

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
Found 1/2" pipe w/bent spike in top, 2' East of road c/l and 2' South of fence posts, East and West

This corner position is accepted as a careful and faithful perpetuation of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
2000 - Placed 3" Alcona County cap, stamped to identify the corner, on 1/2" rerod driven next to existing pipe

Witnesses:
N 80° E 56.26'. 10" Cedar (exist. tag #22435)
S 70° E 48.13' 24" Hemlock (exist. tag #22435)
S 20° W 76.42' 10" White Pine (set tag #41922)
S 85° W 42.77' 10" Apple (exist. tag #22435)

STATE OF MICHIGAN
WAYNE T. LEWIS
PROFESSIONAL SURVEYOR
NO. 41922
LICENSED PROFESSIONAL

Signed by [signature] Date September 14, 2000
Surveyor's Michigan License No. 41922

SURVEY & REMONUMENTATION
FEB 07 2001
SECTION

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED MAY 14,1975
REVISED JAN., 1983
REVISED OCT., 1995