

# LAND CORNER RECORDATION CERTIFICATE

## FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

FOR CORNERS OF--:	LOCATED IN--:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY _____	T. <u>25</u> N. R. <u>14</u> W.	A-7; A-8; B-7; C-7
2. PROPERTY CONTROLLING IN SECTION _____	T. _____ N. S., R. _____ E. W.	_____
3. MISCELLANEOUS PROPERTY IN SECTION _____	T. _____ N. S., R. _____ E. W.	_____
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

REGISTER OF DEEDS STAMP AND FILING NUMBER

I, Carl F. Roser, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on August 18, 1975, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on \_\_\_\_\_, 19\_\_\_\_, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

~~As - Description of original monument and accessories and/or subsequent restoration:~~  
 C. (continued)

C-7

Fd. old angle iron & added 1 1/2"x36" pipe

24" Maple	N44°E	37.81
10" Maple	S34°E	34.59
12" Maple	S42°W	29.48
Ctr. E-W dirt road Due N 8'		

- B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:
- A-7 Fd. and accepted 2"x2" hub for NW corner of Sec. 19. Corner falls at intersection of old fence to N & W and fits R.L.S. H. Bruning's position for NW of Sec. 19.
  - A-8 Restored W 1/4 of Sec. 19 at R.L.S. H. Bruning position for corner per proration to his survey of Sec. 19 (single prop. corner). Corner falls in N-S fence remains. Bedrail was driven by unknown party along side of old H.R.B. traverse hub.
  - B-7 Fd. old 1" pipe & squared cedar post. Same corner as recovered and accepted by R.L.S. H. Bruning in 1969.
  - C-7 Fd. old angle iron in line with old fn. to N. Same corner as recovered & accepted by Bruning in 1969.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

A-7	A-8	B-7
Set DNR mon. & cedar post	Set DNR mon. & cedar post	Fd. 1" pipe & added DNR mon. & ced. pos
6" Maple S74°E 19.4	15" Maple N02°W 20.1	14" BCherry S77°W 14.3
5" Maple S16°W 18.6	14" Maple S84°W 33.0	10" Cedar N22°W 13.6
5" Maple S66°W 9.4	9" Maple S22°W 18.7	7" Cedar N46°E 10.9
5" Maple N03°W 29.3	12" BCherry S - E 23.7	10" W.Pine S82°E 20.5
	Fd. bedrail S12°06'E 23.5	


SIGNED BY Carl F. Roser DATE 3-16-76

SURVEYOR'S MICHIGAN REGISTRATION NO. 12028

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_

APPROVED AND SIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_

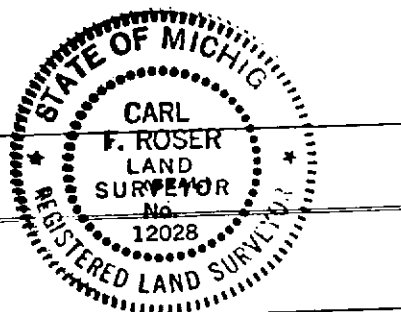

SURVEYOR'S MICHIGAN REGISTRATION NO. \_\_\_\_\_

WELDON TOWNSHIP  
BENZIE COUNTY