

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A. 1970

FOR CORNERS OF—:	LOCATED IN—:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY _____ T. <u>27</u> N. <u>1</u> S. R. <u>1</u> W.		<u>E-12: F-11: F-9: G-11</u>
2. PROPERTY CONTROLLING IN SECTION _____, T. _____ N. S., R. _____ E. W.		_____
3. MISCELLANEOUS PROPERTY IN SECTION _____, T. _____ N. S., R. _____ E. W.		_____
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

REGISTER OF DEEDS STAMP AND FILING NUMBER

I, Kenneth J. Ostling do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above (identified with circles on index code diagram—over) were, in a field survey on ~~December 28~~ 1973, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on _____ 19____, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

- E-12 Recovered corner as restored in 1930's survey by M. Schaaf from U.S.B.T. evidence.
- F-11 Recovered corner as restored in 1930's survey by Marcus Schaaf from probable U.S. evidence.
- F-9 Recovered corner as restored in 1930's survey by M. Schaaf. No U.S. evidence
- G-11 Recovered corner as restored by M. Schaaf in 1930's survey, from U.S. evidence

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

E-12 1½" Pipe with Conc. block	F-11 1½" pipe in conc. base	F-9 1½" pipe in conc. block
10" Tw Bl. Oak N73E 16.4	8" Tw thorn apple N75W 3.4	6" J. pine N47E 12.0
19" R. Pine N6W 105.0	7" Bl. oak S17E 79.0	8" J. pine N27W 23.5
2" R. Pine N79W 28.8	E-W fence - South 15'	
	G-11 Conc. block - no pipe	
	13" R. pine S78E 71.5	
	13" Bl. oak N45E 29.2	


SIGNED BY Kenneth J. Ostling DATE March 12, 1974

SURVEYOR'S MICHIGAN REGISTRATION NO. 10068

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY _____ DATE _____
CHIEF OF SURVEY PARTY

APPROVED AND SIGNED BY _____ DATE _____
MICHIGAN REGISTERED LAND SURVEYOR

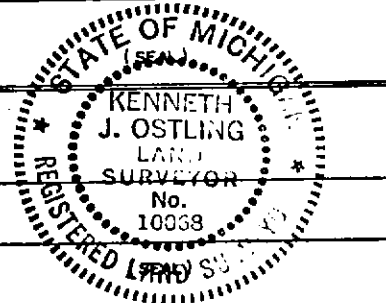

SURVEYOR'S MICHIGAN REGISTRATION NO. _____