

LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

FOR CORNERS OF--:	LOCATED IN--:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY.	T. 28 N. R. 1 W.	(K-6), (K-7)
2. PROPERTY CONTROLLING IN SECTION 13	T. 28 N. R. 1 W.	2; 9
3. MISCELLANEOUS PROPERTY IN SECTION	T. S. R. E. W.	
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

REGISTER OF DEEDS STAMP AND FILING NUMBER

I, Kenneth J. Ostling, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on April 23, 1979, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on _____, 19____, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

C. (continued)

- 9
- Set 5/8" Bar w/RLS Cap and Cedar Post
- 4" Maple N30°E 5.31
- 5" Balsam S27°E 31.9


B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

- K-6 Reset 1953 monument to proper location - midpoint on line between section corners. No previous corner.
- K-7 Corner previously established by proportionate measurement in 1953 DNR survey. No previous corner.
- 2 Set by standard survey procedure for subdivision of sections.
- 9 Set by standard survey procedure for subdivision of sections.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

K-6	K-7	2
DNR Monument & Cedar Post	Left 1953 DNR Mon, in Place	Set 5/8" Bar w/RLS Cap and Cedar Post
5" J. Pine N81°E 27.00	*10" J. Pine N08°W 34.3	5" J. Pine S43°E 25.98
4" J. Pine N06°E 15.02	*8" J. Pine S14°W 27.1	18" R. Pine N11°E 37.3
	*1953 NBT's	

SIGNED BY Kenneth J. Ostling
 SURVEYOR'S MICHIGAN REGISTRATION NO. 10068
 FOR STATE AND UNITED STATES AGENCIES

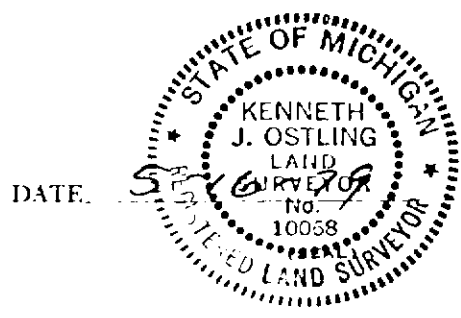

SIGNED BY _____ DATE _____
 CHIEF OF SURVEY PARTY
 APPROVED AND SIGNED BY _____ DATE _____
 MICHIGAN REGISTERED LAND SURVEYOR (SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO. _____ CRAWFORD COUNTY