

# LAND CORNER RECORDATION CERTIFICATE

## FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

| FOR CORNERS OF--                            | LOCATED IN--                   | CORNER CODE NUMBER |
|---|--------------------------------|--------------------|
| 1. PUBLIC LAND SURVEY _____                 | T. 28 N. 5 W.                  | J-5                |
| 2. PROPERTY CONTROLLING IN SECTION 14 _____ | T. 28 N. 5 W.                  | 1; 2               |
| 3. MISCELLANEOUS PROPERTY IN SECTION _____  | T. _____ N. S., R. _____ E. W. |                    |
| 4. LOT NO. _____, RECORDED PLAT _____       |                                |                    |
| 5. PRIVATE CLAIMS _____                     |                                |                    |

REGISTER OF DEEDS STAMP AND FILING NUMBER

I, Corey J. Hughes, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on August 3, 1976, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on \_\_\_\_\_, 19\_\_\_\_, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

- J-5 Set DNR monument midway on line as per B.L.M. instructions.
- 1 Set by standard procedure for the subdivision of sections.
  - 2 Set by standard procedure for the subdivision of sections.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

| J-5                       | 1                                  | 2                                  |
|---------------------------|------------------------------------|------------------------------------|
| Set DNR mon. & cedar post | Set 3/8"x1/2"x30" iron & Ced. post | Set 1/2" hexagon iron & cedar post |
| 4" Maple S36°E 60.2       | W/Loc Tag & 3 stones               | W/Loc Tag                          |
| 7" Maple S09°W 49.6       | 10" Triple Maple S72°W 22.3        | Basswood Clmp. N40°E 30.5          |
| 6" Twin Maple S48°W 38.0  | Maple Clmp. (3) S06°E 47.3         | 7" Basswood S77°E 9.9              |
| Gas Pipe line 850' East   | Maple Clmp. (5) S58°E 46.9         | 7" Maple S57°W 23.0                |
| EW R/L 5.5' South         | N-S two-track 77' West             | EW R/L 8.28' South                 |
|                           |                                    | NS Road 235' East                  |

SIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_

SURVEYOR'S MICHIGAN REGISTRATION NO. \_\_\_\_\_

FOR STATE AND UNITED STATES AGENCIES:


Above corners by Corey J. Hughes, R.L.S. #20706; Title X Survey for Mich. D. \_\_\_\_\_ 1976

SIGNED BY \_\_\_\_\_ DATE \_\_\_\_\_

APPROVED AND SIGNED BY Carl F. Roser 1-16-78 DATE \_\_\_\_\_

Carl F. Roser

MICHIGAN REGISTERED LAND SURVEYOR

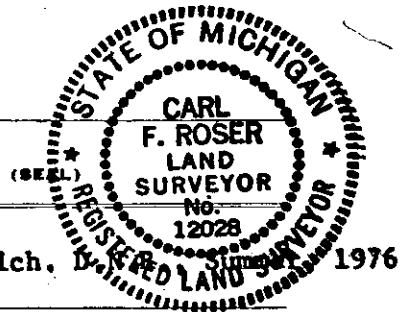

(SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO. 12028

BLUE LAKE TOWNSHIP  
KALKASKA COUNTY

FORM APPROVED BY MICHIGAN STATE BOARD OF REGISTRATION, JAN. 28, 1971  
REVISED MAY 14, 1975

MAY PLACE SKETCH ON BACK OR ATTACHED SHEET