


LAND CORNER RECORDATION CERTIFICATE

FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

FOR CORNERS OF--	LOCATED IN--	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY <u>25</u>	T. <u>10</u> N. R. <u>12</u> W.	<u>M-10, M-11</u>
2. PROPERTY CONTROLLING IN SECTION _____	T. _____ N. S. R. _____ E. W.	_____
3. MISCELLANEOUS PROPERTY IN SECTION _____	T. _____ N. S. R. _____ E. W.	_____
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

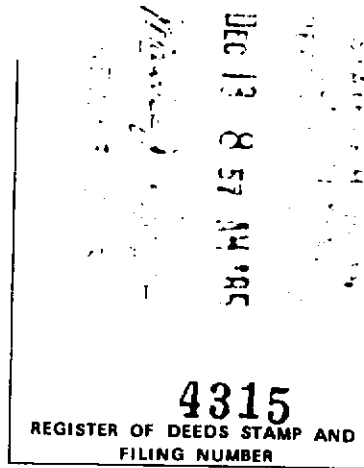

I, Donald Bissell, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on July, 1985, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on _____, 19____, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

M-10 E$\frac{1}{2}$ Cor. Iron West - 43.42' - 14" Elm E. NE - 69.00' - 12" Pine S. SW - 73.63' - 12" Elm E. SE - 90.35' - 10" Oak	M-11 Iron SE - 99.55' - Spike in 30" Oak S. SW - 74.10' - Spike in 20" Oak NE - 71.23' - Spike in C.P. Pole NW - 41.03' - Spike in Sign Post
---	---

Witnesses from Williams & Works

Witnesses from Williams & Works

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

M-10 E$\frac{1}{2}$ Mon. box over 1" iron N10 ^o W - 82.23' - 12" Aspen S46 ^o W - 29.64' - 10" Willow N75 ^o E - 47.47' - Stop Sign Post. S46 ^o E - 45.66' - Stop Sign Post.	M-11 Fd. Iron SE - 99.55' - Spike in 30" Oak S. SW - 74.10' - Spike in 20" Oak NE - 71.23' - Spike in Power Pole NW - 41.03' - Spike in Sign Post
--	--


SIGNED BY _____ DATE _____

SURVEYOR'S MICHIGAN REGISTRATION NO. _____

FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY _____ DATE _____

APPROVED AND SIGNED BY Donald L. Bissell CHIEF OF SURVEY PARTY MICHIGAN REGISTERED LAND SURVEYOR DATE 12-9-85

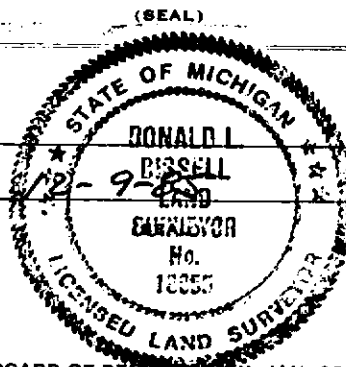

SURVEYOR'S MICHIGAN REGISTRATION NO. 18655