
## WAR 2 9 1999

## REMONUMENTATION

LAPER   Located in:   Corner Code #   RECEIVED FOR RECORD	SECTION	LAND CORNE Filing Requir	R RECORDATION CERTIFIC ement of <u>Act 74, Mich. P.A.</u>	ATE 1970	
Property Controlling S. T. R.  2. Property Controlling S. T. R.  3. Miscellaneous S. T. R.  4. Lot No. Recorded Plat S.  5. Private Calairies S.  3. Shally Withoriesy S.  3. Miscellaneous S. T. R.  4. Lot No. Recorded Plat S.  5. Private Calairies S.  6. Private Calairie	For corners in		TOWN:		
1. Public Land Survey  T. 6.N. R. 11E  1. R.			Corner Code # 7 1/2	RECEIVED FOR RECORD	
2. Property Controlling S T R S S T R S S S T R S S S T R S S S T R S S S T R S S S S	, ,,			99 IAN - E PM 1-20	
2. Property Controlling S T R R 3. Miscellareous S T R R Property in Sec. S T R R Property in Se	1. Public Land Survey			22 ONLA A 114 1 - 50	
2. Property Controlling S T R R 3. Miscellareous S T R R Property in Sec. S T R R Property in Se		TR		Halista. Da Varigh	
3. Miscollaneous S T R Property in Sec. S T R 4. Lot No. Recorded Plat 5. Private Claims 6. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. October 8. 19 8. Shelty W Money in a field survey on October 8. 19 8. October 9. Shelty W Money in a field survey on October 8. 19 8. October 9. Shelty W Money in a field survey on October 8. 19 8. October 9. Shelty W Money in a field survey on October 8. 19 8. October 9. Shelty W Money in a field survey on October 8. 19 8. October 9. Shelty W Money in a field survey on October 8. 19 8. October 9. Shelty W Money in a field survey on October 8. 19 8. October 9. Shelty W Money in a field survey on October 8. 19 8. October 9. Shelty W Money In a field survey on October 8. 19 8. October 9. Shelty W Money In a field survey on October 8. 19 8. October 9. Shelty W Money In a field survey on October 8. 19 8. October 9. Shelty W Money In a field survey on October 8. 19 8. October 9. Shelty W Money In a field survey on October 8. 19 8. October 9. Shelty W Money In a field survey on October 8. 19 8. October 9. Shelty W Money In a field survey on October 8. 19 8. October 9. Shelty W Money In a field survey on October 8. 19 8. October 9. Shelty W Mon	2. Property Controlling	s TR			
Property in Sec. S T R  4. Lot No. Recorded Plat  5. Private Collams  1. Shelty W Morev  9. do hereby certify that under requirements of PA.74. Michigan PA. of \$870, the corner points mentioned in fines 1 and 2 above were in conformance with regulations and rules therefore as required in the interior. But a convey instructions of the United States Department of the Interior, But and of Load States of the United States Department of the Interior, But and of Load States of the United States Department of the Interior, But and of Load States of the United States Department of the Interior, But and of Load States of Load States Department of the Interior, But and of Load States Department of the Interior, But and of Load States Department of the Interior, But and of Load States Department of the Interior, But and of Load States Department of the Interior, But and of Load States Department of the Interior, But and of Load States Department of the Interior, But and of Load States Department of the Interior, But and of Load States Department of the Interior, But and of Load States Department of the Interior, But and of Load States Department of the Interior, But and of Load States Department of the Interior, But and Interior States of Load States Department of the Interior States of Load States Department of Load States Departm		S		LAPEEN DUBINETY, MICHIGAN	
4. Lot No Recorded Plat		S TR		(431)	
5. Private Claims 1. Shelby Windery 198	4. Lot No, Record	ed Plat		Register of Deeds Stamp & File Numbe	
do hereby cettify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines of an of 2 above vere in conformance with trey instructions of the United States Department of the Inferior, Bureau of Land Maragement or by a decree of a Court of Lawr and in that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Lawr, and that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Lawr, and that the corner points were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Lawr, and the conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Lawr, and the Court of Lawrence Court of Lawr, and the Court of Lawr, and the Court of Lawre	5. Private Claims		vev on October 8 19	1	
mentioned in lines 1 and 2 source where in common and with regulations and rules related as expense in the process of the United States Department of the Interior, Bureau of Landwer	98 do hereby certify that	under requirements of P.A. 74, N	lichigan P.A. of 1970, the corner points		
Management or by a decree of a Court of Law and for that the corner points mentioned in lines 3, 4 and 3 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Doces of a Court of Law.  NOTE: Not more than 2 comers, all in the same town and range, may be recorded on this certificate.  A Description of original monument and accessories and/or subsequent restoration:  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  Pound a iron with cap # 14096 in east and west fence line with evidence of fence to north.  1. N 20° W 10' - 10" Poplar. Reset witness above scar in tree.  2. N 50° W 15.93' 8" Poplar. Measured 15.88'  3. S 20° W 7.62' 6" Poplar. Reset witness above scar in tree.  C. Description of monument for corner and accessories established to perpetuate locating the position of the corner.  L-2 REPLACE THE FOUND IRON WITH A 1/2" diameter iron and place A 2" diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in north face of a 12" poplar.  2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in north face of a 12" poplar.  3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in north face of a 12" poplar.  4. Az 305° 15.88' to P. K. ali found in southwest face of a 10" poplar.  5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in north face of a 12" poplar.  6. L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO K-2 2673.98' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	mentioned in lines 1 and 2 above we current manual of survey instruction	ere in conformance with regulation ions of the United States Depar	ns and rules therefore as required in the tment of the Interior, Bureau of Land		
NOTE: Not more than 2 comers, all in the same town and range, may be recorded on this certificate.  A. Description of original monument and accessories and/or subsequent restoration:  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  2. Description of corner evidence found and/or method applied in restoring or recestablishing corner.  2. N 50° W 10° - 10° Poplar. Reset witness above scar in tree.  2. N 50° W 10° - 10° Poplar. Reset witness above scar in tree.  2. N 50° W 7.62° 6° Poplar. Reset witness above scar in tree.  3. S 20° W 7.62° 6° Poplar. Reset witness above scar in tree.  4. Z REPLACE THE FOUND IRON WITH A 1/2° diameter iron and place A 2° diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42° to a P. K. & Lapeer County Remon Tag set in north face of a 12° poplar.  2. Az 100° 23.21° to a P. K. & Lapeer County Remon Tag set in north face of a 12° poplar.  3. Az 205° 7.80° to a P. K. & Lapeer County Remon Tag set in north face of a 12° poplar.  4. Az 305° 15.88° to P. K. nail found in southwest face of a 10° poplar.  5. Az 345° 9.98° to a P. K. & Lapeer County Remon Tag set in north face of a 12° poplar.  6. L2 TO L-1 2863.37° L-2 TO L-3 2637.74° L-2 TO M-2 2695.47°  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above				
NOTE: Not more than 2 comers, all in the same town and range, may be recorded on this certificate.  A Description of original monument and accessories and/or subsequent restoration:  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  Found a iron with cap # 14096 in east and west fence line with evidence of fence to north.  1. N 20° W 10' - 10' Poplar. Reset witness above scar in tree.  2. N 50° W 15.93' 8" Poplar. Measured 15.88'  3. S 20° W 7.62' 6" Poplar. Reset witness above scar in tree.  C. Description of monument for corner and accessories established to perpetuate locating the position of the corner.  L-2 REPLACE THE FOUND IRON WITH A 1/2" diameter iron and place A 2" diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in northwest face of a 12" poplar.  2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in north face of a 12" poplar.  3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar.  4. Az 305° 15.88' to P. K. nall found in southwest face of a 12" poplar.  5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37'  L-2 TO L-3 2637.74'  L-2 TO K-2 2873.98'  L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.					
on this certificate.  A Description of original monument and accessories and/or subsequent restoration:  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  Found a iron with cap # 14096 in east and west fence line with evidence of fence to north.  1. N 20° W 10′ - 10′ Poplar. Reset witness above scar in tree.  2. N 50° W 15.93′ 8″ Poplar. Measured 15.88′  3. S 20° W 7.62′ 5″ Poplar. Reset witness above scar in tree.  C. Description of monument for corner and accessories established to perpetuate locating the position of the corner.  L-2 REPLACE THE FOUND IRON WITH A 1/2″ diameter iron and place A 2″ diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42′ to a P. K. & Lapeer County Remon Tag set in north face of a 12″ poplar.  2. Az 100° 23.21′ to a P. K. & Lapeer County Remon Tag set in north face of a 12″ poplar.  3. Az 205° 15.86′ to P. K. nail found in southwest face of a 10″ poplar.  5. Az 345° 9.98′ to a P. K. & Lapeer County Remon Tag set in west face of a 12″ poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37′  L-2 TO L-3 2637.74′  L-2 TO K-2 2673.98′  L-2 TO M-2 2695.47′  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.		•		7	
A. Description of original monument and accessories and/or subsequent restoration:  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, comer not identified  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, comer not identified  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, comer not identified  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, comer not identified  1. N 20° W 10′ - 10″ Poplar. Reset witness above scar in tree.  2. N 50° W 15.93′ 8″ Poplar. Reset witness above scar in tree.  2. N 50° W 15.93′ 8″ Poplar. Reset witness above scar in tree.  3. S 20° W 7.62′ 6″ Poplar. Reset witness above scar in tree.  4. Cescription of monument for corner and accessories established to perpetuate locating the position of the corner.  4. L2 REPLACE THE FOUND IRON WITH A 1/2″ diameter iron and place A 2″ diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42′ to a P. K. & Lapeer County Remon Tag set in northwest face of a 12″ poplar.  2. Az 100° 23.21′ to a P. K. & Lapeer County Remon Tag set in north face of a 12″ poplar.  3. Az 205° 7.80′ to a P. K. & Lapeer County Remon Tag set in east face of a 12″ poplar.  4. Az 305° 15.88′ to P. K. nail found in southwest face of a 10″ poplar.  5. Az 345° 9.98′ to a P. K. & Lapeer County Remon Tag set in west face of a 14″ poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37′ L-2 TO L-3 2637.74′ L-2 TO K-2 2695.47′  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	NOTE: Not more than 2 comers, all in the same town and range, may be recorded			8 19 20 21 22 23 24	
A Description of original monument and accessories and/or subsequent restoration:  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  2. Description of corner evidence found and/or method applied in restoring or reestablishing corner.  2. Pound a iron with cap # 14096 in east and west fence line with evidence of fence to north.  1. N 20° W 10′ - 10″ Poplar. Reset witness above scar in tree.  2. N 50° W 15.93′ 8″ Poplar. Measured 15.88′  3. S 20° W 7.62′ 6″ Poplar. Reset witness above scar in tree.  C. Description of monument for corner and accessories established to perpetuate locating the position of the corner.  L-2 REPLACE THE FOUND IRON WITH A 1/2″ diameter iron and place A 2″ diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42′ to a P. K. & Lapeer County Remon Tag set in north face of a 12″ epilar.  2. Az 100° 23.21′ to a P. K. & Lapeer County Remon Tag set in north face of a 12″ epilar.  3. Az 205° 7.80′ to a P. K. & Lapeer County Remon Tag set in east face of a 12″ poplar.  4. Az 305° 15.86′ to P. K. nail found in southwest face of a 10″ poplar.  5. Az 345° 9.98′ to a P. K. & Lapeer County Remon Tag set in west face of a 14″ poplar.  FIELD MEASUREMENTS  1. L-2 TO L-1 2863.37′ L-2 TO L-3 2637.74′ L-2 TO K-2 2673.98′ L-2 TO M-2 2695.47′  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	on this certificate.				
1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  1. L4, Pg 279, July 1977 LCRC by Henderson Bates, corner not identified  1. Popular Part of the Part	A Description of original man	nument and acception and	for subsequent restoration:		
Escription of corner evidence found and/or method applied in restoring or reestablishing corner.  Found a iron with cap # 14096 in east and west fence line with evidence of fence to north.  N 20° W 10′ - 10″ Poplar. Reset witness above scar in tree.  N 50° W 15.93′ 8″ Poplar. Measured 15.88′  S 20° W 7.62′ 6″ Poplar. Reset witness above scar in tree.  Escription of monument for corner and accessories established to perpetuate locating the position of the corner.  L-2 REPLACE THE FOUND IRON WITH A 1/2″ diameter iron and place A 2″ diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  Az 40° 19.42′ to a P. K. & Lapeer County Remon Tag set in northwest face of a 12″ poplar.  Az 205° 7.80′ to a P. K. & Lapeer County Remon Tag set in north face of a 12″ poplar.  Az 305° 15.88′ to P. K. nail found in southwest face of a 10″ poplar.  Az 305° 15.88′ to P. K. alpeer County Remon Tag set in west face of a 14″ poplar.  Az 305° 19.98′ to a P. K. & Lapeer County Remon Tag set in west face of a 14″ poplar.  L-2 TO L-1 2863.37′ L-2 TO L-3 2637.74′ L-2 TO K-2 2673.98′ L-2 TO M-2 2695.47′  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	A. Description of original mor	differe and accessories and	· · ·	12 31 32 F 35 F 30 P 35 36	
Escription of corner evidence found and/or method applied in restoring or reestablishing corner.  Found a iron with cap # 14096 in east and west fence line with evidence of fence to north.  N 20° W 10′ - 10″ Poplar. Reset witness above scar in tree.  N 50° W 15.93′ 8″ Poplar. Measured 15.88′  S 20° W 7.62′ 6″ Poplar. Reset witness above scar in tree.  Escription of monument for corner and accessories established to perpetuate locating the position of the corner.  L-2 REPLACE THE FOUND IRON WITH A 1/2″ diameter iron and place A 2″ diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  Az 40° 19.42′ to a P. K. & Lapeer County Remon Tag set in northwest face of a 12″ poplar.  Az 205° 7.80′ to a P. K. & Lapeer County Remon Tag set in north face of a 12″ poplar.  Az 305° 15.88′ to P. K. nail found in southwest face of a 10″ poplar.  Az 305° 15.88′ to P. K. alpeer County Remon Tag set in west face of a 14″ poplar.  Az 305° 19.98′ to a P. K. & Lapeer County Remon Tag set in west face of a 14″ poplar.  L-2 TO L-1 2863.37′ L-2 TO L-3 2637.74′ L-2 TO K-2 2673.98′ L-2 TO M-2 2695.47′  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.		1077 I ODO I I I I	oo Detaa aanaa aat idaatii	13 APPROVISION CONTROL	
Found a iron with cap # 14096 in east and west fence line with evidence of fence to north.  1. N 20° W 10' - 10" Poplar. Reset witness above scar in tree. 2. N 50° W 15.93' 8" Poplar. Measured 15.88' 3. S 20° W 7.62' 6" Poplar. Reset witness above scar in tree.  C. Description of monument for corner and accessories established to perpetuate locating the position of the corner.  L-2 REPLACE THE FOUND IRON WITH A 1/2" diameter iron and place A 2" diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in northwest face of a 12" poplar. 2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in east face of a 12" elm. 3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar. 4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar. 5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO K-2 2673.98' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	1. £4, Pg 2/9, July 1	9// LCRC by Henders	on Bates, comer not identif	led MOONTY	
Found a iron with cap # 14096 in east and west fence line with evidence of fence to north.  1. N 20° W 10' - 10" Poplar. Reset witness above scar in tree. 2. N 50° W 15.93' 8" Poplar. Measured 15.88' 3. S 20° W 7.62' 6" Poplar. Reset witness above scar in tree.  C. Description of monument for corner and accessories established to perpetuate locating the position of the corner.  L-2 REPLACE THE FOUND IRON WITH A 1/2" diameter iron and place A 2" diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in northwest face of a 12" poplar. 2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in east face of a 12" elm. 3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar. 4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar. 5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO K-2 2673.98' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.				- May J-	
Found a iron with cap # 14096 in east and west fence line with evidence of fence to north.  1. N 20° W 10' - 10" Poplar. Reset witness above scar in tree. 2. N 50° W 15.93' 8" Poplar. Measured 15.88' 3. S 20° W 7.62' 6" Poplar. Reset witness above scar in tree.  C. Description of monument for corner and accessories established to perpetuate locating the position of the corner.  L-2 REPLACE THE FOUND IRON WITH A 1/2" diameter iron and place A 2" diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in northwest face of a 12" poplar. 2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in east face of a 12" elm. 3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar. 4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar. 5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO K-2 2673.98' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.				RAY CAM P.S. CO. SUNVEYOR	
<ol> <li>N 20° W 10' - 10" Poplar. Reset witness above scar in tree.</li> <li>N 50° W 15.93' 8" Poplar. Measured 15.88'</li> <li>S 20° W 7.62' 6" Poplar. Reset witness above scar in tree.</li> </ol> C. Description of monument for corner and accessories established to perpetuate locating the position of the corner. L-2 REPLACE THE FOUND IRON WITH A 1/2" diameter iron and place A 2" diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092 <ol> <li>Az 40° 19.42' to a P. K. &amp; Lapeer County Remon Tag set in northwest face of a 12" poplar.</li> <li>Az 100° 23.21' to a P. K. &amp; Lapeer County Remon Tag set in north face of a 12" poplar.</li> <li>Az 205° 7.80' to a P. K. &amp; Lapeer County Remon Tag set in east face of a 12" poplar.</li> <li>Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar.</li> <li>Az 345° 9.98' to a P. K. &amp; Lapeer County Remon Tag set in west face of a 14" poplar.</li> <li>FIELD MEASUREMENTS</li> <li>L-2 TO L-1 2863.37'</li> <li>L-2 TO L-3 2637.74'</li> <li>L-2 TO K-2 2673.98'</li> <li>L-2 TO M-2 2695.47'</li> </ol> THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	B. Description of corner evide	ence found and/or method a	oplied in restoring or reestablishin	g comer: 10-13-48	
2. N 50° W 15.93' 8" Poplar. Measured 15.88' 3. S 20° W 7.62' 6" Poplar. Reset witness above scar in tree.  C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  L-2 REPLACE THE FOUND IRON WITH A 1/2" diameter iron and place A 2" diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in northwest face of a 12" poplar. 2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in north face of a 12" elm. 3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar. 4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar. 5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO K-2 2673.98' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	Found a iron	with cap # 14096 in e	east and west fence line w	vith evidence of fence to north.	
2. N 50° W 15.93' 8" Poplar. Measured 15.88' 3. S 20° W 7.62' 6" Poplar. Reset witness above scar in tree.  C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  L-2 REPLACE THE FOUND IRON WITH A 1/2" diameter iron and place A 2" diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in northwest face of a 12" poplar. 2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in north face of a 12" elm. 3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar. 4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar. 5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO K-2 2673.98' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	1. N 20° W 1	10' - 10" Poplar. Rese	t witness above scar in tr	ee.	
C. Description of monument for corner and accessories established to perpetuate locating the position of the corner.  L-2 REPLACE THE FOUND IRON WITH A 1/2" diameter iron and place A 2" diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in northwest face of a 12" poplar.  2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in north face of a 12" elm.  3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar.  4. Az 305° 15.88' to P. K. naii found in southwest face of a 10" poplar.  5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO K-2 2673.98' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.		•			
L-2 REPLACE THE FOUND IRON WITH A 1/2" diameter iron and place A 2" diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in northwest face of a 12" poplar.  2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in north face of a 12" elm.  3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar.  4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar.  5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO K-2 2673.98' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	3. S 20° W 7	7.62' 6" Poplar. Reset	witness above scar in tre	ee.	
L-2 REPLACE THE FOUND IRON WITH A 1/2" diameter iron and place A 2" diameter brass cap stamped LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in northwest face of a 12" poplar.  2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in north face of a 12" elm.  3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar.  4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar.  5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO K-2 2673.98' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.					
LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in northwest face of a 12" poplar. 2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in north face of a 12" elm. 3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar. 4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar. 5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	C. Description of monument	for corner and accessories e	stablished to perpetuate locating	the position of the corner:	
LAPEER COUNTY REMONUMENTATION, PS#30092  1. Az 40° 19.42' to a P. K. & Lapeer County Remon Tag set in northwest face of a 12" poplar. 2. Az 100° 23.21' to a P. K. & Lapeer County Remon Tag set in north face of a 12" elm. 3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar. 4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar. 5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.		:OUND IRON WITH A 1	/2" diameter iron and place	A 21" diameter brass can stamped	
<ul> <li>2. Az 100° 23.21' to a P. K. &amp; Lapeer County Remon Tag set in north face of a 12" elm.</li> <li>3. Az 205° 7.80' to a P. K. &amp; Lapeer County Remon Tag set in east face of a 12" poplar.</li> <li>4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar.</li> <li>5. Az 345° 9.98' to a P. K. &amp; Lapeer County Remon Tag set in west face of a 14" poplar.</li> <li>FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO M-2 2695.47'</li> <li>THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.</li> </ul>				7 A 2 diameter brass cap stamped	
<ul> <li>2. Az 100° 23.21' to a P. K. &amp; Lapeer County Remon Tag set in north face of a 12" elm.</li> <li>3. Az 205° 7.80' to a P. K. &amp; Lapeer County Remon Tag set in east face of a 12" poplar.</li> <li>4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar.</li> <li>5. Az 345° 9.98' to a P. K. &amp; Lapeer County Remon Tag set in west face of a 14" poplar.</li> <li>FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO M-2 2695.47'</li> <li>THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.</li> </ul>	1 A= 40° 10 42' to c	D K & Lancor Count	Pemon Tag set in northwe	est face of a 12" nonlar	
3. Az 205° 7.80' to a P. K. & Lapeer County Remon Tag set in east face of a 12" poplar.  4. Az 305° 15.88' to P. K. nail found in southwest face of a 10" poplar.  5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.					
5. Az 345° 9.98' to a P. K. & Lapeer County Remon Tag set in west face of a 14" poplar.  FIELD MEASUREMENTS  L-2 TO L-1 2863.37'  L-2 TO L-3 2637.74'  L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	3. Az 205° 7.80' to a	a P. K. & Lapeer County	Remon Tag set in east fac	e of a 12" poplar.	
FIELD MEASUREMENTS  L-2 TO L-1 2863.37' L-2 TO L-3 2637.74' L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.					
L-2 TO K-2 2673.98'  L-2 TO M-2 2695.47'  THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	5. AZ 345° 9,98° to a	IP. K. & Lapeer County	Remon rag set in west rad	ce of a 14 poplar.	
THE SELECTED LOCATION IS ACCEPTED BY ME AND IS GENERALLY ACCEPTED BY PROFESSIONAL SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.	FIELD MEASUREME				
SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.		L-2	TO K-2 2673.98' L-	2 TO M-2 2695.47'	
SURVEYORS AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE ORIGINAL CORNER.					
Signed by Scholing Date 12/30/58					
Signed by Scholing Date 12/30/55		ماريخ ا	CHIEFT TO THE STATE OF THE STAT		
Signed by / July Date 12/80/F8	Simular Sellin	2	MC man for	lac	
Surveyor's Michigan License No. 30052 Secretary 1999	Signed by	OM 2000	Date 12/80	/20	

WAR 2 9 1999

SECTION

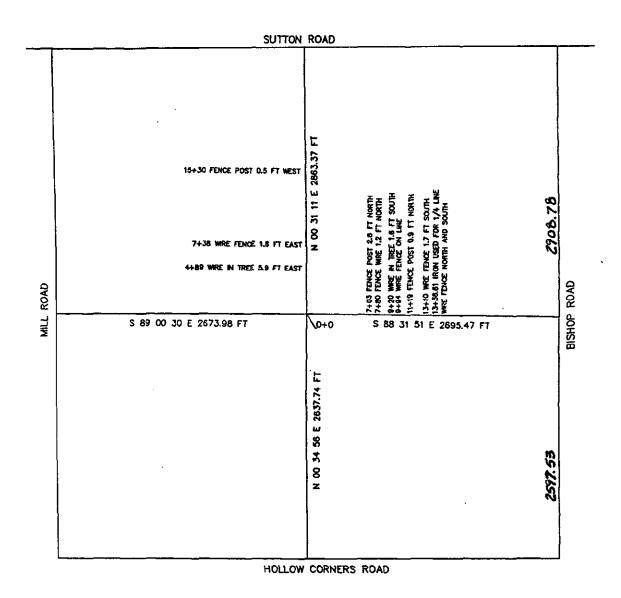

SECTION 1, T6N, R11E DRYDEN TOWNSHIP

REMLC 9.00 REMLC POO75 REMONT 2.00