

**SURVEY & REMONUMENTATION**

DEC 01 1998

**SECTION**

**Ottawa County Remonumentation  
LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970**

For corners in

<u>Ottawa</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>7N</u> R <u>14W</u>	<u>J-1</u> N 1/4, cor. Sec. 2 Polkton Twp
2. Property Controlling in Section	T ___ R ___	___
3. Miscellaneous Property in Sec.	S ___ T ___ R ___	___
	S ___ T ___ R ___	___
	S ___ T ___ R ___	___
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

**RECORDED**  
98 JUL 24 PM 1:46  
*Harry Schiele*  
REGISTER OF DEEDS  
OTTAWA COUNTY, MI  
**Register of Deeds Stamp & File Number**

I, Maurice J. Rosema, in a field survey on Jan. 28, 1998, do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6		5		4		3		2		1	
3												
4	7		8		9		10		11		12	
5												
6	18		17		16		15		14		13	
7												
8	19		20		21		22		23		24	
9												
10	30		29		28		27		26		25	
11												
12	31		32		33		34		35		36	
13												

**A. Description of original monument and accessories and/or subsequent restoration:**

J-1  
This corner was not set by GLO  
LCRC rec. Liber 2, Page 261 (1973 - Englert)  
3/4" pipe  
F. P. - NW 30.22'  
Face of street sign - ENE 29.75'  
Cor. F.P. - SW 37.11'

L.C.R.C. rec. in Liber 1, Page 481 (1994 - Schiele) (rec. as J-13, T8N, R14W)  
C.I. mon.  
nail and OC remon. tag in NW side light pole - N54°E 82.47'  
nail and OC remon. tag in NE side cor. fc. post - S67°E 31.73'  
nail and OC remon. tag in SW side 9" Spruce - S25°E 71.73'  
nail and OC remon. tag in SW side p pole - N47°W 74.37'  
centerline of gravel road N-S - W 3'  
On centerline of gravel road to W and on occ. line to E

**B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:**


J-1  
Found C.I. mon. 0.7' below grade  
Found nail and remon. tag in NE side cor. fence post - SE 31.84'  
Found nail and remon. tag in W side 10" Spruce - SE 71.87'  
Found nail and remon. tag in SW side power pole - NW 74.32'  
Centerline of N-S gravel road - E 3'  
On centerline of gravel road to W  
Center of base of street sign - ENE 30.00'

I hereby accept the C.I. mon. as the position of the corner.

**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**

J-1  
C.I. mon.  
Found nail and remon. tag in Ne side cor. fence post - S64°E 31.84'  
Found nail and remon. tag in W side 10" Spruce - S22°E 71.87'  
Found nail and remon. tag in SW side power pole - N42°W 74.32'  
Center of base of street sign - N85°E 30.00'  
Centerline of N-S bit. conc. road - E 3', on centerline of gravel road to W  
This corner is common with J-13, T8N, R14W

STATE OF MICHIGAN  
JUL 15 1998  
*M.J.R.*

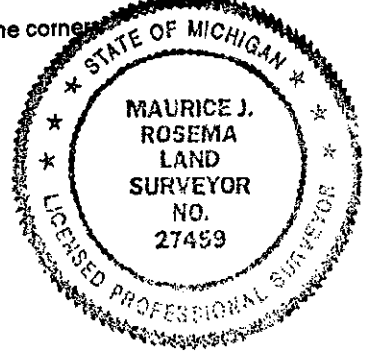

\$11.00 CORNER Receipt #5013

Signed by *Maurice J. Rosema*  
Surveyor's Michigan License No. 27459

Date June 13, 1998

SURVEY &  
REMONUMENTATION

DEC 01 1998

SECTION

