

2582

1998 PRESQUE ISLE COUNTY, STATE OF MICHIGAN REMONUMENTATION

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

Presque Isle  
(County)

Located in:

Corner Code #

1. Public Land Survey

T 34 N R 4 E

H-9

T R

T R

T R

2. Property Controlling in Section

S T R

S T R

3. Miscellaneous Property in Sec.

S T R

S T R

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

PRESQUE ISLE COUNTY  
RECORDED

98 DEC 17 PM 4: 27

*Jane M. Lamb*  
REGISTER OF DEEDS

Register of Deeds Stamp & File Number

I, Delmer E. Porter in a field survey on July 28, 1998 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and for that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

A. Description of original monument and accessories and/or subsequent restoration:

H-9 GLO Notes  
June 27, 1856  
Set Quarter Section Post  
Tamarac 8 N8W 39 Links  
Tamarac 8 S50E 19 Links

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

H-9 1" Pipe  
N04°E 31.76' Fence Corner  
N36°E 37.57' Fence Post  
S49°E 53.75' Fence Post


SURVEY &  
REMONUMENTATION

JAN 14 1999

SECTION

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

H-9 1/2" Iron  
N10°E 38.00' Gate pole  
N36°E 43.02' Gate pole  
N50°E 51.85' Cor FE Post  
S11°W 39.33' P.P. #MS-87  
Fd in Rd C/L with Fence  
Going North-South

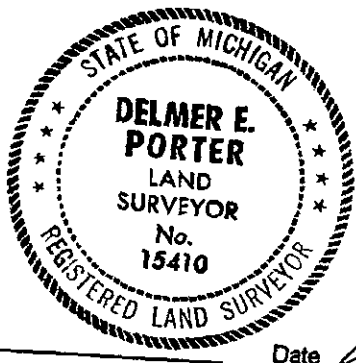

Ratified by Peer Group  
in accordance with P.A. 345  
Chairman *Norman J. Quinn*  
Date 12/17/98

Signed by *Delmer E. Porter*  
Surveyor's Michigan License No. #15410

Date *Dec 9, 1998*