


LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>Presque Isle</u> <small>(County)</small>	Located In:	Corner Code ##
1. Public Land Survey	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S <u>7</u> T <u>35N</u> R <u>03E</u>	<u>9</u>
	S <u>7</u> T <u>35N</u> R <u>03E</u>	<u>6</u>
Public Land Survey	S <u>7</u> T <u>35N</u> R <u>03E</u>	<u>5</u>
Property in Section	S _____ T _____ R _____	_____

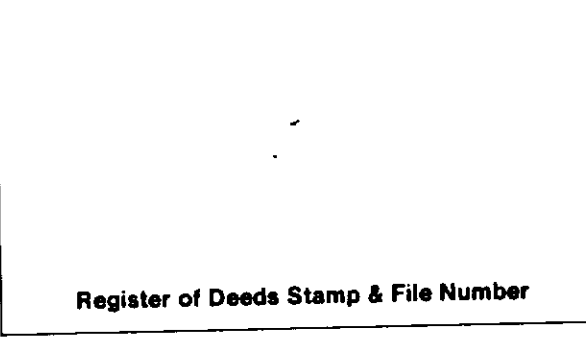

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

A	B	C	D	E	F	G	H	I	J	K	L	M
2	6	5	4	3	2	1						
3												
4	7	8	9	10	11	12						
5												
6	16	17	16	15	14	13						
7												
8	19	20	21	22	23	24						
9												
10	30	29	28	27	26	25						
11												
12	31	32	33	34	35	36						
13												

I, Carl R. Johnson, in a field survey on August 22, 19 90, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
- 9 Corner established by standard procedure for subdividing a section.
 - 6 Corner established by standard procedure for subdivision of a section.
 - 5 Corner established by standard procedure for subdivision of a section.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

<u>9</u> <u>E 1/8 on E & W 1/4 line</u>	<u>5</u> <u>N 1/8 on N&S 1/4 line</u>
Set 5/8" Iron Rod with cap	Set 5/8" I.R. w/cap
Cedar 12" N14W 33.3'	Tamarack 6" N63E 21.3'
Cedar 8" N63E 7.2'	Tamarack 6" S04E 17.8'
Cedar 8" S23W 12.5'	Cedar 12" S49W 15.7'
Cedar 6" S54E 9.3'	

<u>6</u> <u>Center of NE 1/4, 5/8" I.R. w/ cap</u>
W.Pine 8" S71W 27.4'
W.Pine 20" N65W 19.0'
Spruce 8" N17E 8.1'
Maple 6" S80E 25.8'

Signed by Carl R. Johnson
 Surveyor's Michigan License No. 30083

Date 9/17/90

