REMONUMENTATION CORNER

LIBER 1 PAGE 406

RECEIVED FOR RECORD
93 DEC 16 PM 2:04

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

LIBER NO. 1 PAGE NO. 406
ESTHER LEE
REGISTER OF DEEDS
SANILAC CO., MICHIGAN

For corners in

Sanilac (County)

	Located In:	Corner Code ##
1. Public Land Survey	T 11N R 14E	C - 13
	T ___ R ___	
	T ___ R ___	
	T ___ R ___	
2. Property Controlling	S ___ T ___ R ___	Seg. 1 gm
in Section	S ___ T ___ R ___	
3. Miscellaneous	S ___ T ___ R ___	
Property in Sec.	S ___ T ___ R ___	

Register of Deeds Stamp & File Number

4. Lot No. _____ , Recorded Plat _____
5. Private Claims _____

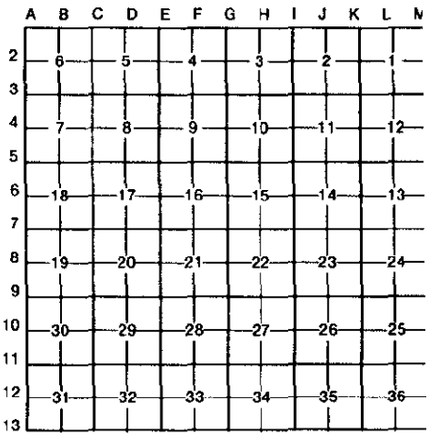

I, John A Milletics, in a field survey on Aug 23, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

C - 13 Found 1/2" iron bar in blacktop, per survey dated Aug. 1987 and consistent with the Sanilac County Road Comm. records.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

C - 13
SE Cor Section 31 T11N-R14E
Found 1/2" iron bar
Set Monu Box
South 18.10' to the west leg of a road sign
N45°E 62.00' to a nail in a Tele Pole
N30°E 38.40' to the East end of a 24"CMP

SURVEY &
REMONUMENTATION
1993
COMMISSION

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C - 13
SE Cor Section 31 T11N-R14E
Set Monu Box
South 18.10' to the west leg of a road sign
N45°E 62.00' to a nail in a Tele Pole
N30°E 38.40' to the East end of a 24"CMP

Signed by John A. Milletics Date Dec 15, 1993

Surveyor's Michigan License No. 25859

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983