

RECEIVED FOR RECORD

98 DEC -1 AM 9:10

LIBER NO. 2 PAGE NO. 268

REMONUMENTATION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

Sanilac (County)	Located In:	Corner Code #
1. Public Land Survey	T13N R15E	A-9
	T R	
	T R	
	T R	
2. Property Controlling in Section	S T R	
	S T R	
3. Miscellaneous Property in Sec.	S T R	
	S T R	

MICHELE VAN NORMAN
REGISTER OF DEEDS
SANILAC CO., MICHIGAN

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, John A. Milletics, in a field survey on Oct 12, 19 98 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	10		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													


NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

A-9 GLO Notes - Hemlock 11 N53W 56; Lynn 10 S24W 33
Old Survey Liber - None
Act 132 - Liber 3 Page 94
Unrecorded survey dated - 11-01-89 , 9-09-94
Road Comm. - None

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

A-9
SW Corner Section 19 T13N-R15E
Found 1" Iron Bar
Accepted as best evidence
North 2659.96 feet to the W 1/4 Corner Section 19
South 2651.60 feet to the W 1/4 Corner Section 30

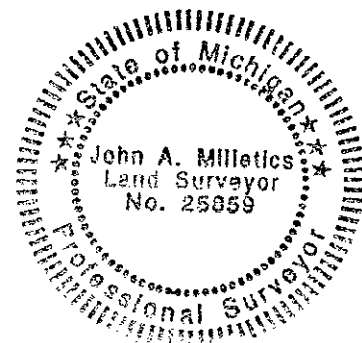

APPROVED PEER BOARD MEETING
NOV 30, 1998

gm

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

A-9
SW Corner Section 19 T13N-R15E
1" Iron Bar
N40°W 62.50 feet to a nail in a Power Pole
N30°E 59.00 feet to a nail in a Anchor Pole
S45°E 51.90 feet to a nail in a Telephone **POLE**
S45°W 47.85 feet to a nail in a Power Pole
North 2659.96 feet to the W 1/4 Corner Section 19
South 2651.60 feet to the W 1/4 Corner Section 30

SURVEY &
REMONUMENTATION

JAN 15 1999

SECTION

Signed by *John A. Milletics*
Surveyor's Michigan License No. 25859

Date Nov 19, 98