

SURVEY & REMONUMENTATION

MAY 29 1998

ALLEGAN COUNTY REMONUMENTATION LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970

For corners in
SECTION
Allegan
(County)

Located In: Cheshire Corner Code # L-13


1. Public Land Survey
2. Property Controlling in Section
3. Miscellaneous Property in Sec.

T1N	R14W	S1/4 36
T	R	<u>L-13</u>
T	R	<u>CHESHIRE</u>
T	R	
S	T	R
S	T	R
S	T	R
S	T	R

REGISTER OF DEEDS
 ALLEGAN COUNTY, MICHIGAN
 98 JAN 21 PM 1:20
 FILED

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

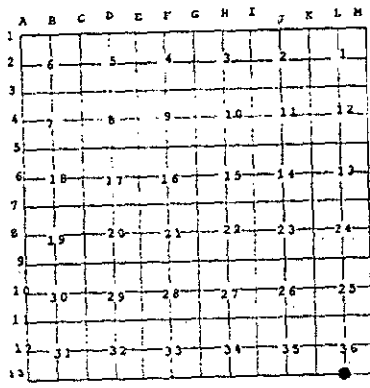

I, Robert E. Lemke, in a field survey on April 20, 1997 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

L-13 GLO	Witness card A (no date)	Witness card 1993 (September 1993)
40.00 Set qtr section post	S 1/4 post 1 inch iron	found nail North side 15 inch maple S 45 E 33.37 feet
Beech 9 inch N 35 E 21 links	steel fence post NW 24.9 feet	nail and tag West side 14 inch walnut South 23.44 feet
Beech 11 inch N 30 W 17 links	steel fence post NE 22.5 feet	nail and tag North Westerly side 18 inch walnut S 37 W 32.25 feet
May 10, 1827	4 inch walnut SW 31.8 feet	found nail South Westerly side 30 inch walnut N 65 W 49.89 feet
Wm. Brookfield	twin 5 inch elm SE 39.5 feet	
	6 inch poplar ESE 51.5 feet	

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
Found 1 inch iron per 1993 witnesses.

And is accepted as a careful and faithful perpetuation of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
Set standard Allegan County monument (3/4" x 24" steel rod w/red cap #23520). Monument is 0.5' below surface of gravel road.
Nail & Allegan Co. Remon Tag 0.85' above grade in N side of 15" Maple S 45 E 32.30'
Nail & Allegan Co. Remon Tag 1.4' above grade in W side of 14" Walnut South 23.55'
Nail & Allegan Co. Remon Tag 1.4' above grade in SE side of 18" Walnut S 40 W 32.28'
Nail & Allegan Co. Remon Tag 0.6' above grade in SW side of 30" Walnut N53 W 49.96'

APPROVED REMONUMENTATION CORNER
P.A.345 OF 1990
ALLEGAN COUNTY
DATE APPROVED 6-10-97
COUNTY REP. K.V.O.

Signed by Robert E Lemke
For SOI CONSULTANTS, LTD.

Date 12/31/97

Surveyor's Michigan License No. 40160

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS
JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983
REVISED OCT., 1985