

**SURVEY
REMONUMENTATION**

APR 29 1998

ALLEGAN COUNTY REMONUMENTATION
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

SECTION
For corners in

Allegan (County)	Located In:	Corner Code #
1. Public Land Survey	T 3N R 14W	G-3
	T ___ R ___	Heath Twp.
	T ___ R ___	
	T ___ R ___	
	T ___ R ___	
2. Property Controlling in Section	S ___ T ___ R ___	
	S ___ T ___ R ___	
3. Miscellaneous Property in Sec.	S ___ T ___ R ___	
	S ___ T ___ R ___	

FILED
1/28/1999 2:44:39 PM

JOYCE A. WATTS
REGISTER OF DEEDS
ALLEGAN COUNTY, MICH


L1000006 PAGE 27

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

I, Kirk L. Van Order, in a field survey on Mar. 30, 1998 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

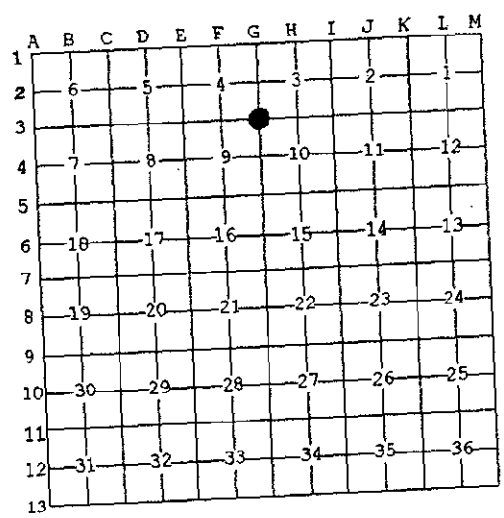

A. Description of original monument and accessories and/or subsequent restoration:

- G-3
(1) GLO Calvin Britain D.S. 1831
North between Sections 9 & 10
80.00 chains set post corner Sections 3, 4, 9 & 10
Beech 10" dia. S54°E 25 links
Pine 24" dia. S72°W 76 links
(2) LCRC Donald A. Ratekin, L. 1, P. 267, dated March 14, 1972
1/2" iron found 1969 (continued on back of sheet)

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

- G-3
Fd. PK nail (& fd. 3/4" x 12" re-rod in mon. box, false corner position removed) with the following witnesses:
Conc. monument N 30.00' (broken)
14" spruce NE 72.15'
Face of fence cor. post N 31.48'
Face of fence cor. post NE 60.07'
Iron in mon. box E,NE 0.5'

APPROVED REMONUMENTATION CORNER
P.A. 345 OF 1990
ALLEGAN COUNTY
DATE APPROVED APRIL 14, 1998
COUNTY REP. [Signature]


And is accepted as a careful and faithful perpetuation of the position of the original corner.
Peer group approved April 14, 1998.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- G-3
Removed PK nail and set standard Allegan Co. Remon. monument (3/4" x 24" steel rod w/red cap #23520)
Nail & Remon. tag in NW side 20" Spruce AZ 60° 72.60'
Nail & Remon. tag in top of 6" x 6" wood cor. fence post AZ 120° 96.51'
C/L 3" dia. steel pipe cor. fence post AZ 01° 31.63'
Face of I-beam speed sign post AZ 45° 60.15'

Signed _____
Surveyor's Michigan License No. 23520

Date 12-23-98



SURVEY
REMONUMENTATION

APR 29 1960

SECTION

LIBRO 006 PAGE 28

Section A (continued from Page 1)

G-3

Heath Twp., T.3N., R.14W.

(Continued No. 2)

- | | | |
|---|-------|--------|
| Fence cor. post | N | 32.49' |
| E. gate post | NE | 51.88' |
| Tel. cable marker | SW | 49.45' |
| Fd. 1/2" iron | | |
| Same ties as above | | |
| (3) D.A. Ratekin & Associates, Inc. recorded survey L. 811, P. 321, dated 5-23-72 | | |
| 1/2" iron | | |
| Same ties as shown in No. 2 | | |
| (4) LCRC by James G. Campbell, recorded in L. 03, P.247, dated May 23, 1979 | | |
| Fd. 1/2" iron | | |
| North F. post | | 32.49' |
| N50°E E. gate post | | 51.88' |
| S45°E Tel. cable post | | 49.45' |
| (5) LCRC by David R. Greer, recorded in L. 003, P. 370, dated Nov., 1983 | | |
| Fd. 1/2" iron | | |
| Face of fence post | North | 32.53' |
| E. gate post | N50°E | 51.88' |
| Tel. cable marker | S45°E | 49.45' |
| 14" Spruce | NE | 72.15' |
| 20" Hickory | SW | 68.78' |
| Concrete monument | North | 30.00' |
| (6) Holland Eng., Inc. | | |
| Witnesses same as in No. 5 | | |
| (7) Kirk L. Van Order survey recorded in L. 1044, P. 277, dated Apr. 6, 1983 | | |
| Fd. 1/2" iron | | |
| Steel fence post | North | 32.49' |
| E. gate post | NE | 51.88' |
| Tel. cable post | SE | 49.45' |
| (8) Kirk L. Van Order survey recorded in L. 1186, P. 187, dated Sept. 5, 1986 | | |
| Fd. iron in mon. box | | |
| Face/fence post | N | 32.53' |
| E. gate post | NE | 51.88' |
| Conc. mon. | N | 30.0' |
| (9) Kirk L. Van Order survey dated July 31, 1996 | | |
| PK nail at corner | | |
| Conc. mon. | N | 30.00' |
| 14" Spruce | NE | 72.15' |
| Face of fence cor. post | N | 31.48' |
| Face of fence cor. post | NE | 60.07' |
| Iron in mon. box | E,NE | 0.5' |