

**SURVEY &
REMONUMENTATION**

FEB 03 1998

1997 ALPENA COUNTY REMONUMENTATION CORNER

**LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970**

SECTION

For corners in

Alpena
(County)

Located in:


Corner Code #

- | | | | | | |
|--------------------------------------|---|------------|---|-----------|---------------------|
| 1. Public Land Survey | T | <u>30N</u> | R | <u>5E</u> | <u>I-9 (SW, 23)</u> |
| | T | | R | | <u>Green Twp.</u> |
| | T | | R | | |
| | T | | R | | |
| 2. Property Controlling in Section | S | | T | | |
| | S | | T | | |
| 3. Miscellaneous Property in Section | S | | T | | |
| | S | | T | | |

Liber **00002** Page **0084**
STATE OF MICHIGAN
County of Alpena
Recorded
08-06-1997 10:45:37
Kathy J. Matash
REGISTER OF DEEDS

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
5. Private Claims _____

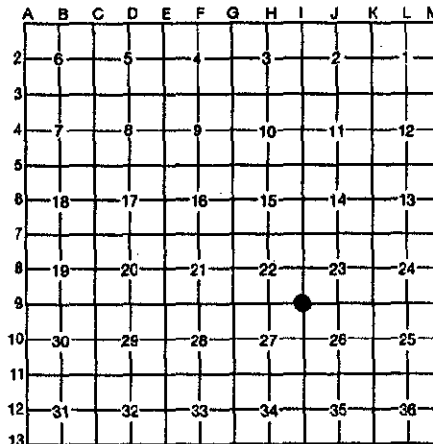

I, Thomas L. Fabis, in a field survey on May 18, 1997, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Professional Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- 1840: G.L.O. Survey by Lewis Clason - Set post & referenced: (Hem 12 N23W 40, Do 12 S62E 20).
1911: County Survey by Jos. W. McNeil - Set new cedar stake and made N.W.T.
1975: Survey W.O. 4-5039 by Robert Paquette of R.S. Scott Engineering Co. - Set 1/2" iron rod & referenced.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


- 1997: Set 1/2" iron rod at intersection of N-S fence line and witnesses from Robert Paquette's Survey.

The position of this corner is compatible with the county and local surveys mentioned above and is accepted as a careful and faithful perpetuation of the position of the original corner.

P.A. 345 ALPENA COUNTY
PEER APPROVED 6/19/97
D.P. B. [Signature]

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

- 1997: Set 1/2" iron rod with 3" dia. aluminum cap, stamped to identify the corner.
Witnesses are:
Existing tag in P. Pole - N15E - 42.33'
Set tags P.S.#31591 in the following reestablished witnesses:
6" Spruce - N35E - 51.51'
5" Ash - N45E - 51.75'
P. Pole - South - 16.83'

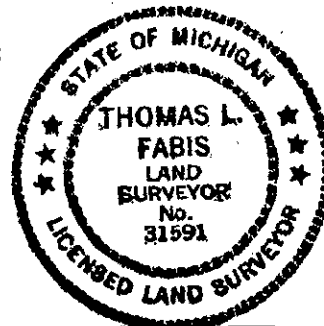

Signed by Thomas L. Fabis
Surveyor's Michigan License No. 31591

Date July 31, 1997