LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

For corners in MATRIX

_____ (County)

		Located In:	Corner Code ##
1. Public Land Survey		T 29N R 5W	C-13,D-13, E-13
		T ___ R ___	
		T ___ R ___	
		T ___ R ___	
2. Property Controlling	S ___	T ___ R ___	
in Section	S ___	T ___ R ___	
3. Miscellaneous	S ___	T ___ R ___	
Property in Sec.	S ___	T ___ R ___	

Register of Deeds Stamp & File Number

4. Lot No. _____ , Recorded Plat _____
5. Private Claims _____

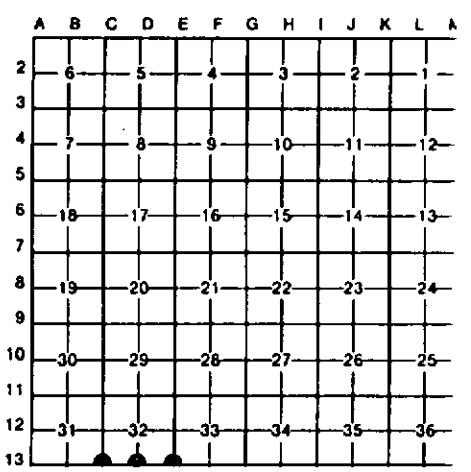

I, C.F.ROSER, in a field survey on JULY.03, 19 89, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

C-13

D-13

E-13

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

C-13

FD. CONS. DEPT. MON. FOR COR COMM. TO SEC'S 31 & 32; AS ESTABLISHED BY K.J.OSTLING IN 1957 DEPT. SURVEY.

D-13

FD. CONS DEPT. MON. FOR G1/4 COR SEC. 32; AS ESTABLISHED BY K.J.OSTLING IN 1957 DEPT. SURVEY.

E-13

FD 1/2" REROD FOR SEC COR COMM TO SEC'S 32 & 33. REROD BELIEVED TO BE RESTORATION OF K.J.OSTLING COR AS ESTABLISHED IN 1957 DEPT. SURVEY. COR IS IN CTR. N-S GRAVEL RD.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-13

FD. CONS. DEPT. MON.; ADDED CEDAR POST.

6" B.CHERRY	N20°W	7.8'
5" R.PINE	N25°E	64.5'
8" R.PINE	N70°E	62.3'
NW COR S-5(28-5)		
IS	N88°22'W	8.55'
CTR N-S TRAIL	WEST	26'

D-13

FD. CONS. DEPT. MON.; ADDED CEDAR POST.

3" R.PINE	S30°W	63.28'
3" R.PINE	S35°W	49.40'
5" R.PINE	S85°W	79.54'
N1/4 COR S-5(28-5)		
IS	N87°57'W	8.58'

E-13

FD 1/2" REROD.

9" B.CHERRY	S50°E	74.97'
8" R.PINE	S40°W	23.92'
8" R.PINE	S85°W	38.17'
NE COR S-5(28-5)		
IS	N87°54'W	8.58'
SET CED POST W/LOC TAG	EAST	33'

Signed by Carl F. Roser 12028 03-30-90 Date _____

Surveyor's Michigan License No. _____

STATE OF MICHIGAN CARL F. ROSER LAND SURVEYOR No. 12028 REGISTERED LAND SURVEYOR

FORM APPROVED BY MICHIGAN STATE BOARD OF [illegible] REVISED [illegible] 14, 197[illegible] REVISED JAN., 19[illegible]