


LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In: Antrim (County)	Located In	Corner Code #
1. Public Land Survey	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S 35 T 29 R 6W	6
	S 35 T 29 R 6W	9
3. Miscellaneous Property in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No: _____	Recorded Plat: _____	
5. Private Claims: _____		

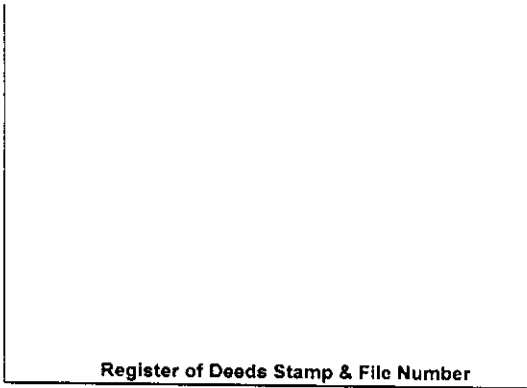

I, Carl T. Kiiskila, in a field survey on October 30, 2000 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:

6 – David G. Heydlauff RLS #32337 Aug. 1978 Cert. of Survey L.530 P. 671 "iron Set" no description of object or witnesses given.

9 – David G. Heydlauff RLS #32337 Aug. 1978 Cert. of Survey L.530 P. 671 "iron Set" no description of object or witnesses given.

B. Description of corner evidence found and/or method applies in restoring or re-establishing corner:

6 Found 1/2" rod with cap RLS #32337

9 – Found 1/2" Rod w/Cap RLS #32337

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

6 – Found 1/2" rod with cap RLS #32337

Wit: 8" Elm	S60°E	5.99'
3" Elm	S37°W	7.46'
6"&9" Twin Maple	N28°E	19.09'
10"-14" Maple Clump	N64°W	70.52'
Carsonite Post	North	1'±

9 – Found 1/2" Rod w/Cap PS #32337

Wit: 16" Basswood	N78°E	4.62'
5" Poplar	South	31.21'
10"&12" Twin Maple	West	31.29'
4" Elm	North	28.48'
Carsonite Post	North	1'±

Signed by: Carl T. Kiiskila
 Surveyor's Michigan License No.: 33981

Date: 4-15-02

