

SURVEY & LINES
MONUMENTATION

002 TAB: 176


LAND CORNER RECORDATION CERTIFICATE

FEB 17 1994

FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

COMMISSION

FOR CORNERS OF--	LOCATED IN--	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY <u>20</u>	T. <u>30</u> N. S., R. <u>7</u> E. W.	<u>C-8</u>
2. PROPERTY CONTROLLING IN SECTION	T. _____ N. S., R. _____ E. W.	_____
3. MISCELLANEOUS PROPERTY IN SECTION	T. _____ N. S., R. _____ E. W.	_____
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

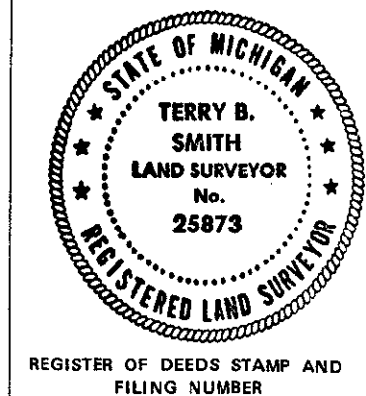

I, Terry B. Smith, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on Dec. 6, 19 93, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on Dec. 6, 19 93, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

Oct. 20, 1855
Beech 9 N83W 19
Beech 9 S68E 17

ANTRIM COUNTY
 RECEIVED FOR RECORD
 93 DEC 14 AM 10:52
 Wanda Q. Conway
 REGISTER OF DEEDS


B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

Found existing "T" iron in center line of bituminous roadway. Measurement indicate this is the corner. Peer group approval to set monument in position of "T" iron.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-8 W < Corner Section 20, T30N, R7W
Set Antim County monument & cap in monument box
Utility pole N70°E 64.40
Utility pole S30°E 99.40
N. Gate Post N70°W 61.20

SIGNED BY Terry B. Smith DATE _____
 SURVEYOR'S MICHIGAN REGISTRATION NO. 25873



FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY _____ DATE _____
 CHIEF OF SURVEY PARTY
 APPROVED AND SIGNED BY _____ DATE _____
 MICHIGAN REGISTERED LAND SURVEYOR

(SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO. _____