


FEB 17 1994
LAND CORNER RECORDATION CERTIFICATE
 FILING REQUIREMENT OF ACT 74, MICH. P.A.1970
 COMMISSION

FOR CORNERS OF--:	LOCATED IN--:	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY 20	T. 30 N. R. 7 S. E. W.	C-9
2. PROPERTY CONTROLLING IN SECTION	, T. _____ N. S., R. _____ E. W.	_____
3. MISCELLANEOUS PROPERTY IN SECTION	, T. _____ N. S., R. _____ E. W.	_____
4. LOT NO. _____, RECORDED PLAT _____		
5. PRIVATE CLAIMS _____		

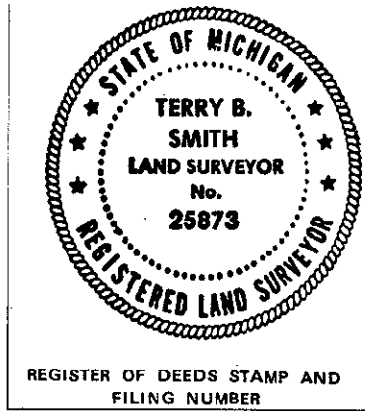

I, Terry B. Smith, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were, in a field survey on Dec. 6, 1993, established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were, in a field survey on Dec. 6, 1993, found, recovered, restored, established or re-established as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories and/or subsequent restoration:

Oct. 1855
 Cedar 18 N34E 34
 Birch 10 S34W 17

ANTRIM COUNTY
 MICHIGAN
 RECEIVED FOR RECORD
 93 DEC 14 AM 10:52
 Wanda G. Conway
 REGISTER OF DEEDS


B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

Corner recorded Liber 231 page 1000
 June 8, 1977
 RR Spike
 UP N45W 51.4
 UP S60W 78.5
 UP N45E 43.8
 Peer group approves setting monument in place

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-9 SW Corner Sec. 20, T30N, R7W
 Set Antrim County Monument and monument box
 Utility pole N50°E 38.90
 Utility pole N45°W 55.48
 Utility pole S70°W 61.20

SIGNED BY Terry B. Smith DATE Dec 1993
 SURVEYOR'S MICHIGAN REGISTRATION NO. 25873



FOR STATE AND UNITED STATES AGENCIES:

SIGNED BY _____ DATE _____
CHIEF OF SURVEY PARTY
 APPROVED AND SIGNED BY _____ DATE _____
MICHIGAN REGISTERED LAND SURVEYOR

(SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO. _____