

# LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970


For Corners In:			
Arenac	Located In	Corner Code #	
(County)			
1. Public Land Survey	T _____ R _____		
	T _____ R _____		
2. Property Controlling in Section	S 18 T 19N R 3E	4	
	S 18 T 19N R 3E	5	
3. Miscellaneous Property in Section	S _____ T _____ R _____		
	S _____ T _____ R _____		

4. Lot No: \_\_\_\_\_ Recorded Plat: \_\_\_\_\_

5. Private Claims: \_\_\_\_\_

I, Craig W. McVean, in a field survey on Oct. 27, 2005 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

**NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.**

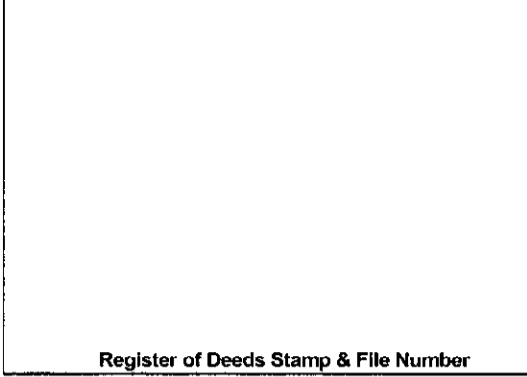

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6			5		4		3		2		1	
3													
4	7		8		9		10		11		12		
5													
6	18			17		16		15		14		13	
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:

4 - None 5 - None



B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

<p><u>4</u> - NW 1/16, Sec. 18 - Set stamped 2" Alum. Cap per Standard BLM procedure. E-W single strand is 36' S; N-S Single strand is 51' W. Corner of single strand N &amp; E is S52°W 63'.</p>	<p><u>5</u> - CN 1/16, Sec. 18 Set stamped 2" Alum. Cap per Standard BLM procedure. E-W single strand is 15.5' N.</p>
---	---

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

<p><u>4</u> - Set 2" Alum. Cap stamped on 5/8" x 34" rebar S55°W 19.98' to set N &amp; T in NW side 6" Ash N06°E 22.91' to set N &amp; T in E. side 5" Oak N64°E 24.36' to set N &amp; T in N. side 11" Oak S76°E 57.09' to set N &amp; T in SW side 16" R. Maple Set Blue Carsonite Post with loc. tag 1' SW</p>	<p><u>5</u> - Set stamped 2" Alum. Cap on 5/8" x 34" rebar S27°W 42.84' to set N &amp; T in W. side 13" Ash S55°E 57.93' to set N &amp; T in SW side 6" Elm N25°W 55.32' to set N &amp; T in W. side 13" R. Maple N41°E 40.58' to set N &amp; T in SE side 10" R. Maple Set Blue Carsonite Post with loc. tag 1' South</p>
---	--

Signed by: Craig W. McVean Date: 11/30/2005  
 Surveyor's Michigan License No.: 39088