

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In:
Arenac Located In _____ Corner Code # _____
 (County)


- | | | | | | |
|--------------------------------------|-------------|--------------|-------------|--|-----------|
| 1. Public Land Survey | T _____ | R _____ | | | |
| | T _____ | R _____ | | | |
| 2. Property Controlling in Section | S <u>34</u> | T <u>20N</u> | R <u>3E</u> | | <u>16</u> |
| | S _____ | T _____ | R _____ | | |
| 3. Miscellaneous Property in Section | S _____ | T _____ | R _____ | | |
| | S _____ | T _____ | R _____ | | |

4. Lot No: _____ Recorded Plat: _____

5. Private Claims: _____

I, Craig W. McVean, in a field survey on Oct. 5, 205 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

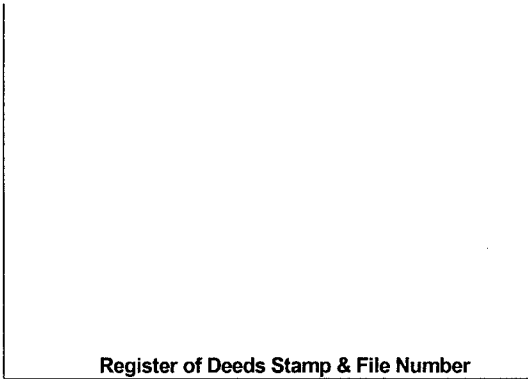

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:

16 - None

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

16 - E 1/16 Cor. on S. Line Sec. 34, T20N, R3E – Set stamped 2" Alum. Cap on 5/8" x 23" rebar in Old M-76 per Standard BLM procedure. Centerline of Bit. NW-SE is 2.4' NE.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

16 – Stamped 2" Alum. Cap on 5/8" x 23" rebar
 East 55' to set Blue Carsonite Post with loc. tag
 East 27.41' to found 3/4" iron pipe per MDOT at E 1/16 Cor. on N. line Sec. 3, T19N, R3E.
 N64°W 102.21' to set N & T in NE side 20" J. Pine
 N80°E 54.05' to fd. MSHD N & T in S. side 48" W. Pine
 N29°E 65.48' to set N & T in NW side 14" Tw. W. Pine



Signed by: Craig W. McVean
 Surveyor's Michigan License No.: 39088

Date: 11/30/2005