


LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In: Arenac Located In _____ Corner Code # _____
(County)

- | | | | | |
|--------------------------------------|-------------|--------------|-------------|---|
| 1. Public Land Survey | T _____ | R _____ | | |
| | T _____ | R _____ | | |
| 2. Property Controlling in Section | S <u>36</u> | T <u>20N</u> | R <u>4E</u> | 5 |
| | S <u>36</u> | T <u>20N</u> | R <u>4E</u> | 9 |
| 3. Miscellaneous Property in Section | S _____ | T _____ | R _____ | |
| | S _____ | T _____ | R _____ | |

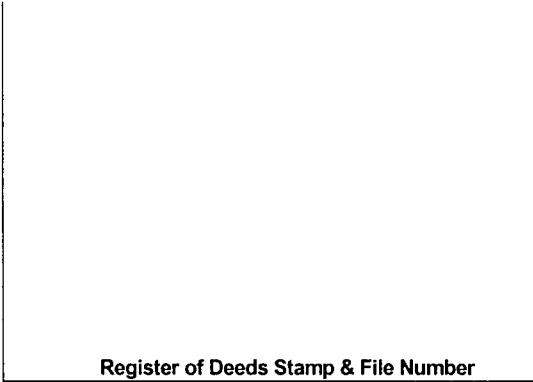

Register of Deeds Stamp & File Number

4. Lot No: _____ Recorded Plat: _____

5. Private Claims: _____

I, Craig W. McVean, in a field survey on January 10, 2002 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:
5 - None 9 - None



B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:
5 - CN 1/16 Cor., Sec. 36 - Set 2" Alum. Cap on 5/8" x 32" rebar per standard BLM procedure. NE 10' to bank of stream.
9 - CE 1/16 Cor., Sec. 36 - Set 2" Alum. Cap on 5/8" x 34" Rebar per standard BLM procedure. Fallen anchor post for down fences E & S is 3± N. Corner on E. slope of stream valley.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
5 - 2" AC on 5/8" x 32" rebar
 SE 1' to set Blue Carsonite Post w/ loc. tag
 N50°E 37.03' to N & T in N side 20" W. Pine
 S32°E 11.67' to nail in W side 8" Tw. R. Maple
 S3°W 11.29' to N & T in W side 10" S. Maple
 N55°W 23.02' to nail in SW side 5" R. Maple scribed 'XBT'
9 - 2" AC on 5/8" x 34" rebar
 NW 1' to set Blue Carsonite Post w/ loc. tag
 N80°E 10.56' to N & T in S side 10" Hemlock
 S42°E 20.32' to N & T in SW side 15" Hemlock
 S30°W 11.17' to N & T in NW side 4" Oak
 N29°W 34.05' to N & T in W side 2" Oak

Signed by: Craig W. McVean
 Surveyor's Michigan License No.: 39088

Date: 3/4/2002