

LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970


For Corners In: Arenac Located In _____ Corner Code # _____
(County)

- | | | | | |
|--------------------------------------|-------------|--------------|-------------|----------|
| 1. Public Land Survey | T _____ | R _____ | | |
| | T _____ | R _____ | | |
| 2. Property Controlling in Section | S <u>36</u> | T <u>20N</u> | R <u>4E</u> | <u>3</u> |
| | S _____ | T _____ | R _____ | |
| 3. Miscellaneous Property in Section | S _____ | T _____ | R _____ | |
| | S _____ | T _____ | R _____ | |

4. Lot No: _____ Recorded Plat: _____
5. Private Claims: _____

I, Craig W. McVean, in a field survey on January 15, 2002 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

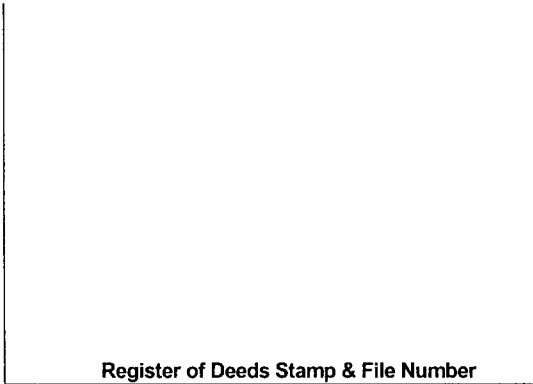

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:
3- None

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:
3- N 1/16 Corner common to Sec. 35 & 36 - Set 2" Alum. Cap on 5/8" x 34" Rebar per standard BLM procedure.

Reference Pt. - Fd. capped 'T' #29240 @ S83°23'E 8.21' from Corner '3'. Appears 'T' iron was misplaced. 'T' iron not utilized as '3' in this survey.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
3- 2" AC on 5/8" x 34" rebar

- SE 1' to set Blue Carsonite Post w/ loc. tag
- N88°W 13.20' to N & T in N side 9" Oak
- S7°W 28.02' to N & T in W side 14" R. Maple
- S83°E 30.59' to N & T in N side 8" Oak
- N22°W 30.85' to N & T in W side 3" W. Pine
- S83°23'E 8.21' to Fd. capped 'T' iron - Ref. Pt.



Signed by: Craig W. McVean
Surveyor's Michigan License No.: 39088

Date: 3/4/2002