


LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In: Arenac Located In _____ Corner Code # _____
(County)

1. Public Land Survey	T _____	R _____		
	T _____	R _____		
2. Property Controlling in Section	S <u>36</u>	T <u>20N</u>	R <u>4E</u>	<u>2</u>
	S <u>36</u>	T <u>20N</u>	R <u>4E</u>	C-N-NE 1/64
3. Miscellaneous Property in Section	S _____	T _____	R _____	
	S _____	T _____	R _____	

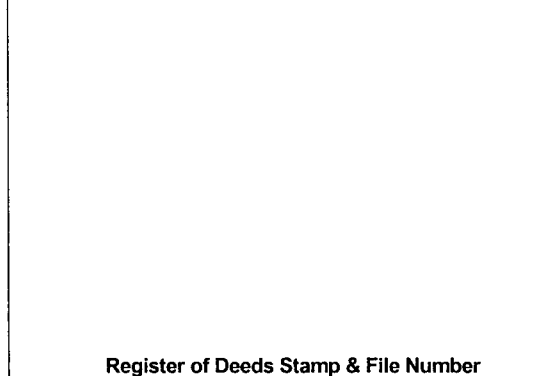

4. Lot No: _____ Recorded Plat: _____

5. Private Claims: _____

I, Craig W. McVean, in a field survey on January 15, 2002 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:
2 - CSR - Bk. 16, P. 27 - 1921 corner noted. C-N-NE 1/64 - None



B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:
2 - E 1/16 Cor. common to Sec. 25 & 36 - C-N-NE 1/64 Cor., Sec. 36 - being the NW cor. of the S 1/2 of NE 1/4 of NE 1/4, Sec. 36 - Set 2" Alum. Cap on 5/8" x 34" Rebar per standard BLM procedure.
 No evidence of position referenced by Co. notes.
 Set 2" Alum. Cap n 5/8" x 34" Rebar per standard BLM Procedure. Centerline of E-W gravel Rd. is 13' N.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
2 - 2" Alum. Cap on 5/8" x 34" rebar - Down 0.5' C-N-NE 1/64 - 2" Alum. Cap on 5/8" x 34" rebar
 South 33.00' to set 2" Alum. Cap on 5/8" x 34" rebar
 on line w/ Blue Carsonite Post w/ location tag.
 S33°W 27.33' to N & T in SE side 32" W. Pine
 S56°W 41.42' to N & T in NW side 26" W. Pine
 N38°E 54.11' to N & T in NW side 11" W. Pine SW 1' to set Blue Carsonite Post w/ loc. tag
 N62°E 14.33' to N & T in NW side 5" R. Maple - scribed 'XBT'
 S60°W 20.20' to N & T in NW side 4" R. Maple - scribed 'XBT'
 S46°E 20.83' to N & T in NE side 4" Oak
 N67°W 24.65' to N & T in N side 10" Oak

Signed by: Craig W. McVean
 Surveyor's Michigan License No.: 39088

Date: 3/4/2002