

# LAND CORNER RECORDATION CERTIFICATE

## FILING REQUIREMENT OF ACT 74, MICH. P.A.1970

FOR CORNERS OF--	LOCATED IN--	CORNER CODE NUMBER
1. PUBLIC LAND SURVEY	T. 20 N. R. 5 E.	G-15; I-1; I-13
2. PROPERTY CONTROLLING IN SECTION- 33	T. 20 N. R. 5 E.	16
3. MISCELLANEOUS PROPERTY IN SECTION-	T. N. R. W.	
4. LOT NO. RECORDED PLAT		
5. PRIVATE CLAIMS		

REGISTER OF DEEDS STAMP AND  
FILING NUMBER

I, Kenneth J. Ostling, do hereby certify that under requirements of P.A. 74 Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in a field survey on Sept 17 1979 established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior Bureau of Land Management or by a decree of a court of law. Furthermore, that the corner points mentioned in lines 3, 4 and 5 above were in a field survey on \_\_\_\_\_ established, re-established, monumented, re-monumented, recovered or restored as expressed below and in conformance with the rules of the Michigan State Board of Registration for Land Surveyors or, by a Decree of a Court of law:

A. Description of original monument and accessories established to perpetuate the position of the corner.  
C. (continued)

16  
Set 5/8" Rod w/RLS Cap &  
Cedar Post  
12" Oak N27°E 14.4  
10" Oak N40°W 9.5


B. Description of corner evidence found and or method applied in restoring or re-establishing corner.

- 13 Set corner by 3-mile single proportionate measurement, according to survey of record by G. H. Hollister in 1910.
- 1 Found 4"x2' piece of sign post which we conclude was placed for the corner. Fits road alignment south and east and conforms to Hollister record.
- 13 Set corner relative to what we conclude to be closing corner between Sec. 3 & 2, T19N-R5E. Fits road alignment north and east and Hollister record.
- 16 Set corner by standard survey procedure for the subdivision of sections.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner

G-13	I-1	I-13
Set DNR Mon. & Cedar Post	Set DNR Monument	Set DNR Monument
8" Birch N12°E 3.40	11" Cherry S35°W 66.1	Nail in PP N79°E 94.38
5" Birch N68°E 20.05	10" Maple N87°W 76.18	6" Cherry N17°W 79.55
Cor to Sec. 3-4 T19N-R5E	Cor to Sec. 34-35 T20N-R5E	Cor 3-2 T19N-R5E is
is S89°49'30"W 39.6	is N89°49'30"E 46.9	S89°49'30"W 46.9

SIGNED BY Kenneth J. Ostling  
SURVEYOR'S MICHIGAN REGISTRATION NO. 10068  
FOR STATE AND UNITED STATES AGENCIES.

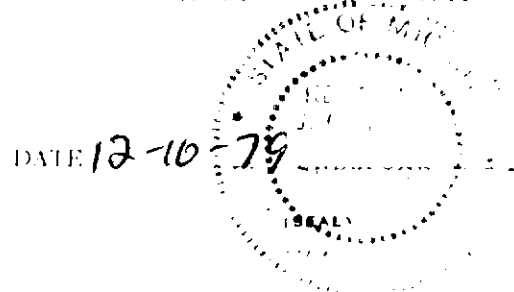

SIGNED BY \_\_\_\_\_  
CHIEF OF SURVEY PARTY  
APPROVED AND SIGNED BY \_\_\_\_\_  
MICHIGAN REGISTERED LAND SURVEYOR

DATE \_\_\_\_\_  
DATE \_\_\_\_\_  
(SEAL)

SURVEYOR'S MICHIGAN REGISTRATION NO

ARENAC COUNTY