


LAND CORNER RECORDATION CERTIFICATE
 Filing Requirement of Act 74, Mich. P.A. 1970 as Amended

For corners in

<u>Baraga</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T 49N R 32W	F11
	T 49N R 32W	E9
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

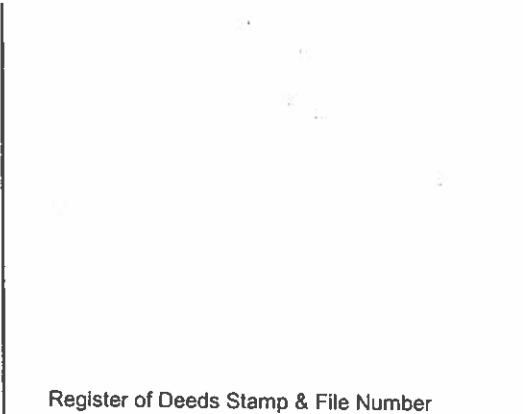

I, Stephan J. Szyszkoski, in a field survey on 08/07/13 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

1	A	B	C	D	E	F	G	H	I	J	K	L	M
2		6		5		4		3		2		1	
3													
4		7		8		9		10		11		12	
5													
6		18		17		16		15		14		13	
7													
8		19		20		21		22		23		24	
9													
10		30		29		28		27		26		25	
11													
12		31		32		33		34		35		36	
13													

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:
 (F11) Quarter corner common to Sections 28 and 33. 1988 - Keith Sackett RLS restored the corner position midway and on line between Section corners. Set 1"x36" iron pipe with 4" aluminum cap. 16" Sugar S70°W 36.9', 3" Cedar S05°E 32.2', 5" Maple N15°E 41.2'.

(E9) Corner common to Sections 20-21-28-29. 1992 - Reestablished by C.E.Hein RLS. Set 3/4" pipe with 2" brass cap 23" a.g. 9" R.Maple N78°E 38.05', 7" R.Maple N25°E 55.43', 6" Balsam S63°E 60.69'.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
 (F11) Found the 1988 monument in good condition, at record bearing and distance from the Cedar and Sugar NBTs, both in good condition, and substantially at the record position between Section corners. Accepted the monument as a careful and faithful reestablishment of the position of the original corner.

(E9) Found the 1992 monument in good condition and at record bearing and distance from the R.Maple NBTs NE, both in good condition. Accepted the monument as a careful and faithful reestablishment of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

(F11) Found 1"ID I.pipe with 4" alum. MDNR cap. Set measuring nail with MDNR tag in the side of: 9" Cedar S03°E 32.65' old blazes 1988 NBT 21" Sugar S72°W 37.95' do do 7" Cedar N67°W 7.95' mrkd "1/4S NBT" 6" Spruce N03°E 14.65' do Set sq'd cedar post adjacent. E= 7899308.786 N= 203548.557	(E9) Found 3/4"ID iron pipe with 2" brass cap. Found the 1992 NBTs as follows: 11" Maple N27°E 55.45' old blazes / nail & tag 12" Maple N80°E 38.05' do do Set measuring nail with MDNR tag in the side of: 9" Maple S77°E 49.1' mrkd "S28 NBT" 4" Balsam S46°E 53.6' do Set sq'd cedar post adjacent. E= 7898546.359 N= 205164.427
---	--

Bearings are magnetic. Coordinates are MCS83 in meters (NAD83(2011) Datum).
 Coord. Ref.=NGS PID RL0041: N= 210246.990 m. E= 7895426.989 m.

Signed by Stephan J. Szyszkoski Date 09/04/2013
 Surveyor's Michigan License No. 33986

For the Michigan Department of Natural Resources, Forest Resources Division

