


LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>Baraga</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>50N</u> R <u>34W</u>	<u>I12</u>
	T <u>50N</u> R <u>34W</u>	<u>H11</u>
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

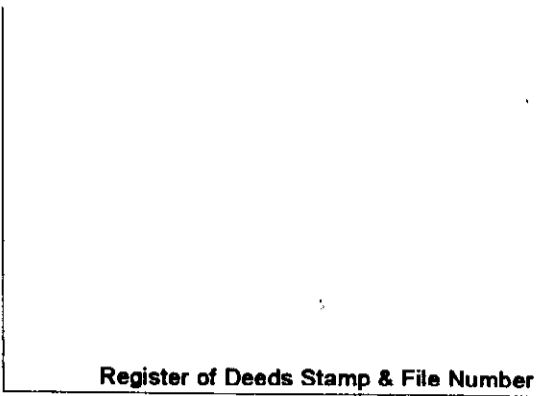

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

Apr 29 2003

I, Stephan J. Szyszkoski, in a field survey on _____, 20____ do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6		5		4		3		2		1	
3												
4	7		8		9		10		11		12	
5												
6	18		17		16		15		14		13	
7												
8	19		20		21		22		23		24	
9												
10	30		29		28		27		26		25	
11												
12	31		32		33		34		35		36	
13												

A. Description of original monument and accessories and/or subsequent restoration:
 (I12) Quarter corner common to Sections 34-35. 1849: Established by Wm Burt: North between Sections 34 & 35...40.00 Set Sugar qr. post. Y. Birch 12 N23W 11, Sugar 12 S23E 31...80.00 Set Sugar post corner of Sections 26,27,34,35.
 (H11) Quarter corner common to Sections 27 & 34. 1849: Established by Wm Burt: West corrected [between Sections 27 & 34]...39.795 Set Maple qr. Sect. post. Spruce 8 N30E 8, Fir 6 S25W 13...79.59 Section corner.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
 (I12) The original post and accessories were not recovered. Reestablished the corner midway and on a straight line between Section corners 2632.53' north and south.
 (H11) The original post and accessories were not recovered. Reestablished the corner midway and on a line of mean true bearing between Section corners 2628.83' east and west.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
 (I12) Set 1"IDx32" I.pipe with 4" alum. MDNR cap. Blazed, scribed, and set measuring nails in:
 16" Hemlock S35E 11.7' "1/4S NBT"
 12" Oak S54W 29.3' do
 15" Hemlock N59W 7.3' do
 13" Hemlock N01W 20.1' do
 Bearings are magnetic. Distances are to nail with tag. Placed a sq'd cedar post adjacent.
 (H11) Set 1"IDx32" I.pipe with 4" alum. MDNR cap. Blazed, scribed, and set measuring nails in:
 8" Hemlock N15E 29.1' "1/4S NBT"
 18" Hemlock N76E 17.4' do
 11" Y.Birch S04W 19.9' do
 18" Hemlock N65W 20.7' do
 Set a sq'd cedar post adjacent.
 Bearings are magnetic. Distances are to nail with tag.



Signed by Stephan J. Szyszkoski Date 5/22/03
 Surveyor's Michigan License No. 33986