


**LAND CORNER RECORDATION CERTIFICATE**  
**Filing Requirement of Act 74, Mich. P.A. 1970**

For corners in

Baraga _____ (County)	Located In:	Corner Code #
1. Public Land Survey	T 52N R 31W	K2
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

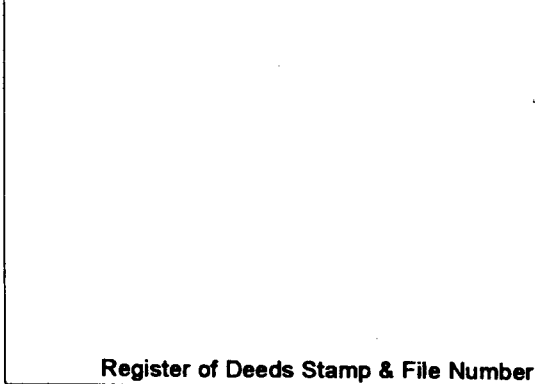

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
 5. Private Claims \_\_\_\_\_

Jun 24 2002

I, Stephan J. Szyszkoski, in a field survey on \_\_\_\_\_, 20\_\_ do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

**NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.**

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6			5		4		3			2		1
3													
4	7			8		9		10		11		12	
5													
6	18			17		16		15		14		13	
7													
8	19			20		21		22		23		24	
9													
10	30			29		28		27		26		25	
11													
12	31			32		33		34		35		36	
13													

**A. Description of original monument and accessories and/or subsequent restoration:**  
 (K2) Quarter corner common to Sections 1 and 2. Established in 1846 by William Ives: South between Sections 1 and 2...40.00 Set qr. Sect. post. Sugar 10 N71E 05, Y.Birch 10 S38W 24...80.00 Set post corners of Secs. 1-2-11-12.

**B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:**  
 (K2) The original post and accessories were not recovered. Found no evidence of the position of the original corner on the ground. Reestablished the corner midway and on a line of mean true bearing between monumented section corners 2636.54 ft. north and south.

**C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:**  
 (K2) Set 1"IDx32" I.pipe with 4" alum.  
 MDNR cap. Blazed and scribed:  
 9" Maple N68E 13.8' "1/4S NBT"  
 9" Y.Birch S72E 20.9' do  
 9" Maple S78W 6.8' do  
 10" Maple N25W 14.9' do  
 Set sq'd Y.Birch post adjacent.  
 Bearings are magnetic. Distances are to notch in lower blaze.



Signed by Stephan J. Szyszkoski  
 Surveyor's Michigan License No. 33986

Date 6/24/2002