

**SURVEY &
REMONUMENTATION**

FEB 17 1998



Sandy Sohondelmayer - Barry Co. LCRCR


2633

Page: 1 of 1
12/16/1997 12:15P

SECTION

**BARRY COUNTY REMONUMENTATION
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970**

For Corners in BARRY COUNTY	Located in:	Corner Code #
1. Public Land Survey SEC. COR COMMON TO SEC'S. 11, 12, 13 & 14 BARRY TWP.	T..1N R..9W T..... R..... T..... R..... T..... R.....K-5.....
2. Property Controlling in Section	S.....T..... R..... S.....T..... R.....
3. Miscellaneous Property in Sec.	S..... T..... R..... S..... T..... R.....
4. Lot No....., Recorded Plat.....		
5. Private Claims.....		

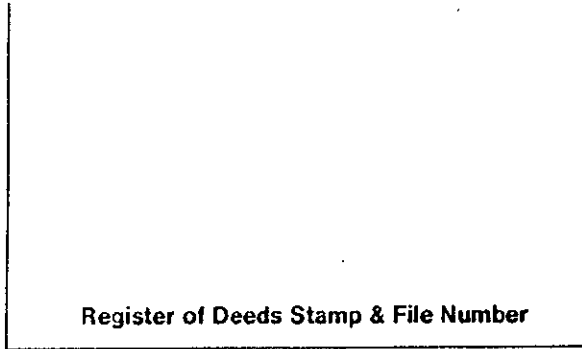

Register of Deeds Stamp & File Number

	A	B	C	D	E	F	G	H	I	J	K	L	M
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

RAYMOND MOORED, in a field survey on JANUARY 20, 1996 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4, and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below.

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

a. Description of original monument and accessories and/or subsequent restoration:
S.L.O. S. SIBLEY, D.S. 1826; SET POST; B. OAK 8 N11E 22, IRONWOOD 7 S701/2W 27.
CO. SURVEYOR BOWEN (16,17 DEC. 78) BROWN BARRY FIELD BOOK, PG. 85; LIB.1, PG. 275
FOUND BY BEARINGS AND TESTIMONY OF EDWARD WILLISON; W. OAK N701/2E 22, W. OAK S801/2W 37
LCRC # 436 REC. 23 JULY 91 BY R. CARR FOUND 5/8" IRON; 40" OAK WEST 23.50' TO FD. PK; 12" OAK N30E 53.00'; TELE
RISER N50E 46.70' TO FACE AT BASE; IN C/L ROADS N, S, & E.
ACT 132 SURVEY BY R. CARR RECORDED 23 JULY 91; WITNESSES SAME AS LCRC ABOVE.

b. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
FOUND 5/8" IRON PER LCRC # 436 ABOVE
SET BARRY COUNTY REMONUMENTATION IRON W/ CAP.

ACCEPTED THIS POSITION AS A CAREFUL AND FAITHFUL PERPETUATION OF THE POSITION OF THE ORIGINAL CORNER.

APPROVED BY BARRY COUNTY REMON PEER GROUP ON 11 March, '96 *RR*

c. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
SET STANDARD BARRY COUNTY REMONUMENTATION IRON WITH CAP
NAIL IN SE SIDE 48" OAK WEST 24.30'
NAIL IN SW SIDE 14" OAK N30E 53.05'
NAIL IN NE SIDE 6" POPLAR S20W 70.20'
ON LINE WITH C/L ROADS NORTH, SOUTH AND EAST
FACE OF TELEPHONE CABLE BOX N50E 46.65'

Signed by Raymond Moored
Surveyor's Michigan License No. 26463

Date 12/11/97

