SECTION

# BAY COUNTY REMONUMENTATION 1999
# LAND CORNER RECORDATION CERTIFICATE
**Filing Requirement of Act 74, Mich. P.A. 1970**

For corners in

BAY (County) Located in: **MERRITT TOWNSHIP** Corner Code #

1. Public Land Survey T 13N R 6E — B-11
   T ___ R ___
2. Property Controlling S ___ T ___ R ___
3. Miscellaneous Property in Sec. S ___ T ___ R ___

RECORDED
1999 DEC 29 P 12: 54
Barbara Forbes Christiane
REGISTER OF DEEDS
BAY COUNTY, MICHIGAN

Register of Deeds Stamp & File Number

4. Lot No. ___, Recorded Plat ___
5. Private Claims ___

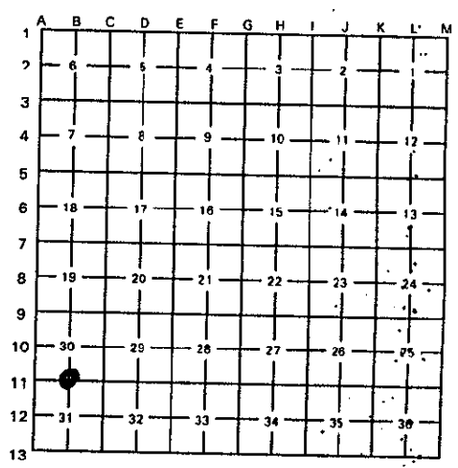


I, BRIAN D FERGUSON, in a field survey on MAY, 19 99 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

WOOD POST SET BY J. WAMPLER, DS, IN 1821. NO EVIDENCE OF ORIGINAL CORNER REMAINS.
NO LCRC'S FOR THIS CORNER
COS BY MCGINNIS, L781, P544, IN 1976
COS BY MCGINNIS, L853, P612, IN 1978

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

FOUND 3/4" PIPE IN SOUTH SHOULDER OF KINNEY ROAD
MEASURED 2643.20 TO C-11 (REC 2643.5' COS L781, P544)
MEASURED 2586.82' TO A-11 (REC 2580.76' COS L781, P544)

ACCEPTED AS THE BEST AVAILABLE EVIDENCE OF THE LOCATION OF THE ORIGINAL CORNER

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

SET 5/8" RE-BAR W / BAY COUNTY REMON. BRASS CAP & NO. 26454 IN MONUMENT BOX
N10E 40.24' TOP CTR HYDRANT
S70E 91.70' S BOLT 1' BELOW HEADWALL
N30W 99.43' SE COR HSE #756
S08E 120.70' NW COR BARN/GARAGE #733

Signed by Brian D Ferguson Date December 16, 1999

STATE OF MICHIGAN
BRIAN D FERGUSON
LAND SURVEYOR
NO. 26454
PROFESSIONAL SURVEYOR

Surveyor's Michigan License No. 26454

APPROVED LAND CORNER
P.A. 345 OF 1990 - Bay County
Date 6.24.99
MM
Michael MacDonald P.S.

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983
REVISED OCT., 1995

004 351