SECTION

BAY COUNTY REMONUMENTATION 1999
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

BAY (County) Located in: **MERRITT TOWNSHIP** Corner Code #

1. Public Land Survey T 13N R 6E D-13
   T____ R____
2. Property Controlling S____ T____ R____
3. Miscellaneous Property in Sec. S____ T____ R____
   S____ T____ R____

RECORDED
1999 DEC 29 P 12:53
REGISTER OF DEEDS
BAY COUNTY, MICHIGAN

Register of Deeds Stamp & File Number

4. Lot No._____, Recorded Plat_____
5. Private Claims_____

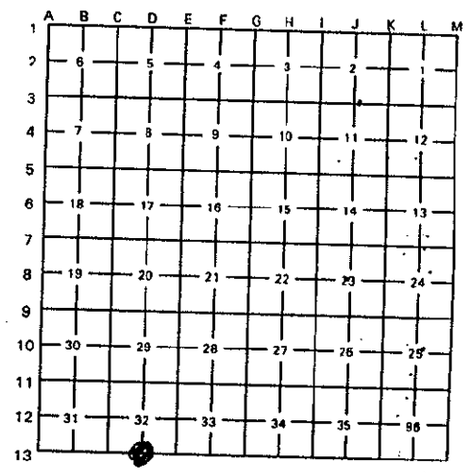

I, BRIAN D FERGUSON, in a field survey on MAY, 19 99 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

WOOD POST SET BY J. WAMPLER, DS, IN 1821. NO EVIDENCE OF ORIGINAL CORNER REMAINS.
LCRC BY MCGINNIS, L001 P77, IN 1972
COS BY BURGIN, L1307 P633, L1096 P427
COS BY DE LA MATER, L657 P277

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

FOUND 5/8" ROD 1' OFF ROAD ON SPLIT BETWEEN C-13 AND E-13, BUT NOT ON LINE
LOCATION AGREES WITH COS'S AND LCRC
LCRC L7 P206, SAGINAW COUNTY (D-1) TIES INTO THIS CORNER
MEASURED 2607.71' TO C-13 (REC 2608.0 L1096 P427)
MEASURED 2607.83 TO E-13 (REC 2608.02' L1307 P633)

ACCEPTED AS THE BEST AVAILABLE EVIDENCE OF THE LOCATION OF THE ORIGINAL CORNER

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

SET 5/8" RE-BAR W / BAY COUNTY REMON. BRASS CAP & NO. 26454 IN MONUMENT BOX
EAST 5.74' 3" BRASS SAG CO REMON COR (REC 5.75'
S50E 27.80' TOP CTR S END 18" CMP (REC 27.0' L1096 P427)
N45E 42.10' FCE STREET SIGN
NORTH 11.3' PHYSICAL CENTER LINE RD (REC 11.3' L1307 P633)

STATE OF MICHIGAN
BRIAN D FERGUSON
LAND SURVEYOR
NO. 26454
PROFESSIONAL SURVEYOR

Signed by Brian D Ferguson Date December 15, 1999
Surveyor's Michigan License No. 26454

APPROVED LAND CORNER
P.A. 345 OF 1990 - Bay County
Date 11.18.99
MM
Michael MacDonald P.S.

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983
REVISED OCT., 1995

004 339