

SECTION

BAY COUNTY REMONUMENTATION 1999
LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

BAY
(County)

MERRITT TOWNSHIP
Located in: Corner Code #

- 1. Public Land Survey T 13N R 6E G-11
- 2. Property Controlling S T R
- 3. Miscellaneous S T R
- Property in Sec. S T R

RECORDED


1999 DEC 29 P 12:53

BRIAN D FERGUSON
REGISTER OF DEEDS
BAY COUNTY, MICHIGAN

Register of Deeds Stamp & File Number

- 4. Lot No. _____, Recorded Plat _____
- 5. Private Claims _____

I, BRIAN D FERGUSON, in a field survey on MAY, 19 99 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

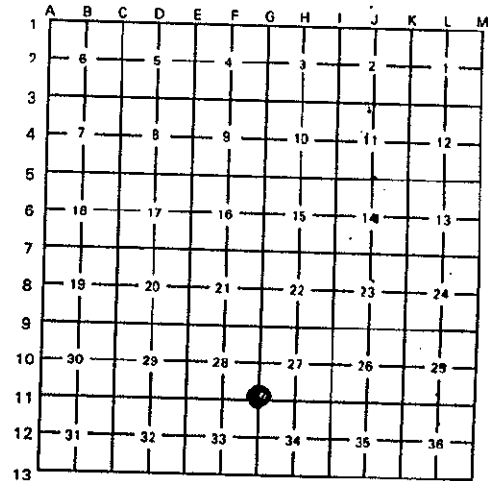

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

WOOD POST SET BY J. WAMPLER, DS, IN 1821. NO EVIDENCE OF ORIGINAL CORNER REMAINS.
LCRC BY GOSS, L001 P519, IN 1973
COS BY MCGINNIS, L737 P294

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:


CORNER NOT FOUND. RESET CORNER FROM WITNESSES ON LCRC AND COS
MEASURED 2639.47' TO G-10
MEASURED 2610.30' TO F-11
MEASURED 2652.43' TO H-11 AND 2652.17' FROM H-11 TO I-11

ACCEPTED AS THE BEST AVAILABLE EVIDENCE OF THE LOCATION OF THE ORIGINAL CORNER

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

SET 5/8" RE-BAR W / BAY COUNTY REMON. BRASS CAP & NO. 26454 IN MONUMENT BOX
N45E 50.9' FCE UTIL POLE (REC 50.9')
N50W 47.5' FCE CONC PROJECT MARKER (REC 47.5')
N40E 54.30' TOP/CTR AMER RISER
N45W 52.38' TOP/CTR AMER RISER

Signed by Brian D Ferguson Date _____
Surveyor's Michigan License No. 26454



APPROVED LAND CORNER
P.A. 345 OF 1990 - Bay County
Date 11, 18, 99
MM
Michael MacDonald P.S.

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983
REVISED OCT., 1995

004 333