

SURVEY & REMONUMENTATION

APR 26 1995

COMMISSION

Bay County Remonumentation

LAND CORNER RECORDATION CERTIFICATE Filing Requirement of Act 74, Mich. P.A. 1970


For corners in

Bay (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>14N</u> R <u>5E</u>	<u>13</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

REGISTERED
 BAY COUNTY, MICHIGAN
 DEC 28 9 46 AM '94
 RECORDED
 003 160
 Register of Deeds Stamp & File Number

I, Craig W. McVean, in a field survey on November, 19 94, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

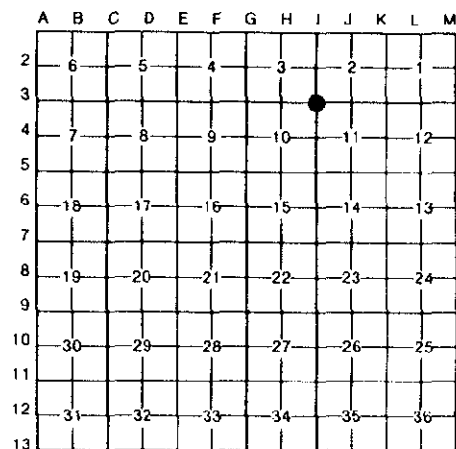

A. Description of original monument and accessories and/or subsequent restoration:

13 Not set in original GLO survey.
Hunter Engineering survey for Dow Chemical in Section 10 - 1956.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

13 Set remon. monument by extending E. line of Section 10 North from I 5 through I 4 and intersecting the N. line of Section 10 extended East from G 3 through H 3. This position of I 3 is established as a witness corner to the Government Meander Corners S. and W. as follows: N 89°42'29" W. 259.41' to meander corner on N. line of Section 10 (2635.41' W. to H 3 - GLO 2376' E. from H 3 to MC) and S 3°04'35" W. 773.99' to meander corner on E. line of Section 10 (2621.99 - S. to I 4 - GLO 1848' N. from I 4 to MC)

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

13 Set 2-3/4" Bay County brass cap on 5/8" x 24" rebar in mon. box - down 0.5' - on E. edge of N.-S. gravel road as witness corner to meander corners along Saginaw River to S. and W.
N 60° W 29.15' to nail and tag in S. side U.P.
N 13° E 69.42' to chiseled "x" in top bolt on S. side of W'ly. tower leg.
S 5° W 159.60' to nail and tag in W. side U.P.
N 50° E 53.48' to chiseled "x" in concrete pad of S. tower leg.
S 20° W 72.67' to capped 3/8" rebar.
N 89°42'29" W 259.41' to GLO meander corner position (not set).
S 3°04'35" W 773.99' to GLO meander corner position (not set).

APPROVED LAND CORNER
P.A. 345 OF 1990 - Bay County
Date 10 Nov 94
MM
Michael MacDonald P.S.
County Representative



Signed by Craig W. McVean
Surveyor's Michigan License No. 39088

Date 12/17/94