


# LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In: <u>Benzie</u> (County)	Located In	Corner Code #	
1. Public Land Survey	T _____ R _____		
	T _____ R _____		
2. Property Controlling in Section	S <u>26</u> T <u>25N</u> R <u>14W</u>		<u>4</u>
	S <u>26</u> T <u>25N</u> R <u>14W</u>		<u>6</u>
3. Miscellaneous Property in Section	S _____ T _____ R _____		
	S _____ T _____ R _____		
4. Lot No: _____	Recorded Plat: _____		
5. Private Claims: _____			

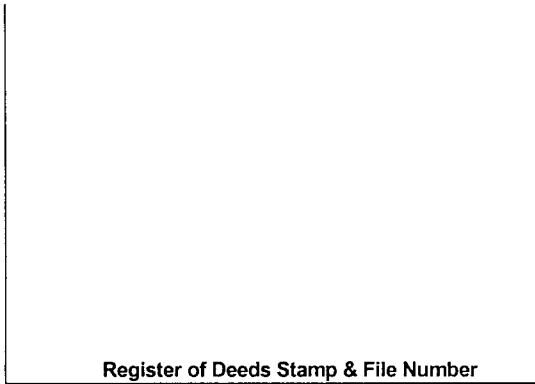

I, Craig W. McVean, in a field survey on January 21, 2003 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

**NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.**

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

A. Description of original monument and accessories and/or subsequent restoration:

4 - None 6 - None



B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

4 - NW 1/16 Cor., Sec. 26 - Set 2" Aluminum Cap (Stamped) on 5/8" x 34" Rebar per Standard BLM procedure. Edge of Swamp is 43' ± North and also 44' ± East.

6 - NE 1/16 Cor., Sec. 26 - Set 2" Aluminum Cap (Stamped) on 5/8" x 34" Rebar per Standard BLM procedure. Remains of old down E-W Fence is 4' ± North.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

4 - 2" AC on 5/8" x 34" Rebar  
 SE 1' to Set Blue Carsonite Post with location tag.  
 N28°W 10.18' to set N&T in NE Side 14" R. Maple  
 N78°E 31.74' to set N&T in N Side 9" Y. Birch  
 S50°E 16.68' to set N&T in NE Side 10" R. Maple  
 S48°W 10.89' to set N&T in SE Side 6" Tw. R. Maple

6 - 2" AC on 5/8" x 34" Rebar  
 SE 1' to Set Blue Carsonite Post with location tag.  
 S3°W 8.30' to set N&T in W. Side 11" R. Maple Clp.-6  
 S20°W 17.11' to set N&T in E side 11" R. Maple  
 N58°W 46.19' to set N&T in NE side 6" Y. Birch  
 N28°E 30.14' to set N&T in W side 20" R. Maple Clp.-5

Signed by: Craig W. McVean  
 Surveyor's Michigan License No.: 39088

Date: 1/27/2003