


LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In:			
<u>Benzie</u>	Located In	Corner Code #	
(County)			
1. Public Land Survey	T <u>26N</u> R <u>13W</u>	<u>C7</u>	
	T _____ R _____	_____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____	_____
	S _____ T _____ R _____	_____	_____
3. Miscellaneous Property in Section	S _____ T _____ R _____	_____	_____
	S _____ T _____ R _____	_____	_____

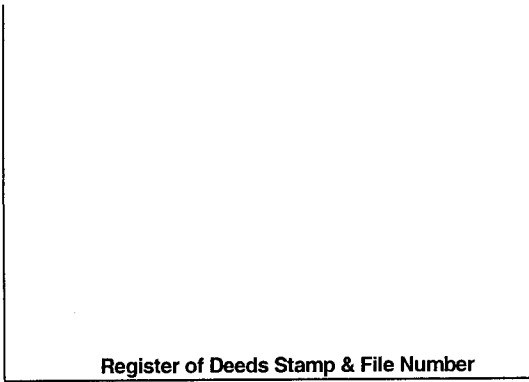


4. Lot No: _____ Recorded Plat: _____

5. Private Claims: _____

I, Craig W. McVean, in a field survey on June 18, 2007 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

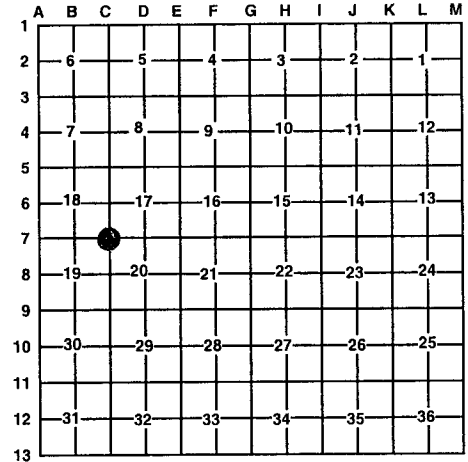

A. Description of original monument and accessories and/or subsequent restoration:

- | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><u>C7</u> – 1839 – GLO – Alvin & Austin Burt – Set post cor. Sec's 17, 18, 19.
 1) Sugar 10" N61°W 42 Links
 2) Sugar 11" S58°E 26 Links</p> <p>- 1868 – County Surveyor Records – George E. Steele-Reset from original BT's. 39.82 Ch. to F ('B7')</p> <p>- 1870 - County Surveyor Records – George E. Steele-39.66 Ch. to F ('D7')</p> <p>- 1939 – Department of Conservation Survey and Notes– C. M. Cade - Shows monument. This stake is as close to the section cor. common 17, 18, 19, 20 as will ever be found by any surveyor or anyone else. It is on Centerline Road to South and on Centerline Road to West and practically on prolongation of Sec. line from SW 18 to S ¼ 18. There is no definite marked point for at least 2 miles South. The local evidence here governs. 3) Elm 7" N56°E 25.3'; (10" Elm N50°E 25.5' – notes); 4) Double Elm 6" N49°W 55.6'; 5) Elm 20" S47°W 48.0' (30" Elm S35°W 48.3' – Notes); 6) Pt.'J' is 22.8' East-Notes</p> | <p>- 1968 – Department of Conservation Survey Map – K. J. Ostling - Found monument by Cade.
 6) Found ¾" pipe 22.75' East of Monument.
 7) Maple 10" N39½°W 66.6'; 8) Elm 9" S71°E 70.9'</p> <p>- 1973 – Recorded Survey-L. 1, p. 256 – found iron.
 7) Maple 10" N39½°W 66.6'; 3) Elm 14" N51½°E 25.0';
 8) Elm 9" S71°E 70.9'</p> <p>- 1980 – LCRC- L. 1, p. 157 – C. F. Roser – Found old square concrete monument that fits BT's by R.L.S. H.R. Bruning, added DNR monument flush with ground and Cedar post.
 9) Maple 8" N15°W 61.2'
 7) Maple 14" N37°W 66.6'
 3) Elm stump 14" N52°E 25.0'
 8) Elm stump 9" S71°E 70.9'</p> <p>- 2006 – Recorded Survey- #2006S-00059 – John B. Smendzuik. Found DNR Alum. Cap on iron in concrete.
 7) Maple 15" N38°W 67.27';
 10) Twin 10" & 7" Maple N31°W 40.10';
 11) Maple 36" S15°W 141.61; 12) S. Pine 6" S34°W 101.63'</p> |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

B. Description of corner evidence found and/or method applied in restoring or re-establishing corner:

C7 – Section Corner common to Sections 17, 18, 29 & 20, T26N R13W - Found 4" DNR Aluminum cap on West side of 6" x 6" x 2.5' long concrete tablet (bottom ½ of Cade monument). DNR Monument on island for 'T' gravel and sand road intersection and basically at PI ± of Roads W & S. 2-track N is 12'± East. It appears Roser reset disturbed and broken Cade Mon. on East side DNR Mon. Witnesses # 1 to 6 & 8 are gone. #9- fd. scribed stump. Accepted found DNR monument as the best available evidence of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C7 – Replaced 4" DNR Alum. Cap on 1" x 36" galv. iron pipe with stamped 3" Benzie Co. Remon. Brass Cap on ¾" x 36" long iron pipe encased in 4" x 36" concrete cylinder.
 Set Cedar post 0.9' North
 N39°W 67.21' to fd. nail in NE side 20" S. Maple (#7)
 N4°E 63.41' to set Nail & Tag in E. side 6" S. Maple
 S13°W 141.56' to Fd. nail in W. side 36" S. Maple (#11)
 N35°W 40.05' to fd. nail in NE side 12" and 8" Tw. S. Maple (#10)
 East 54.56' to set Nail & Tag in N. side 3" S. Maple

Signed by: Craig W. McVean
 Surveyor's Michigan License No.: 39088

Date: 1/14/2008

