


LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

<u>Benzie</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>26N</u> R <u>14W</u>	<u>C-2</u>
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

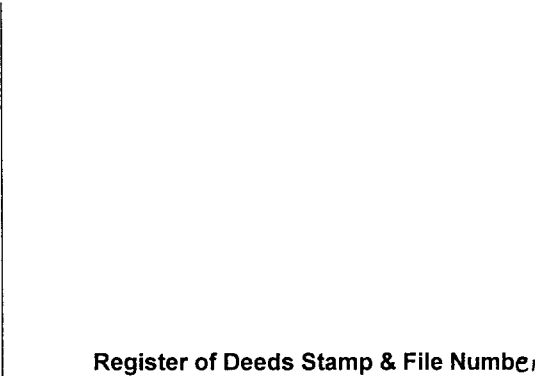

4. Lot No. _____, Recorded Plat _____

5. Private Claims _____

I, Craig W. McVean, in a field survey on May 7, 19 98 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

A	B	C	D	E	F	G	H	I	J	K	L	M
1												
2	6	●	5		4		3		2		1	
3												
4	7		8		9		10		11		12	
5												
6	18		17		16		15		14		13	
7												
8	19		20		21		22		23		24	
9												
10	30		29		28		27		26		25	
11												
12	31		32		33		34		35		36	
13												

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

<u>C-2</u> – GLO – Set ¼ Post – Alvin & Austin Burt – 1839 Pine 15" S80°W 11L Cedar 6" N86°E 31L Stream 10L – W is 1.40ch. N. -Co. Bk. 2,P. 12 – James Pettitt Set by original BT's	-R.M. Harris – File # 95-3391 - 1995 Cedar Post FND. 8" Spruce S89°E 16.18' 6" Cedar S52°E 17.25' 8" Cedar S61°W 6.52' 10" Cedar N50°W 7.58' Iron Post set beside.
--	--

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

C-2 – ¼ Corner common to Sec.'s 5 & 6, T26N,R14W. FND. 4"x4.6' squared top cedar post up 2'± w/spike on top & steel fence post on E. side. Also FND. Rotted off 3"x2' cedar stake bottom on W. side. Dig down & find 5"x3.2' long cedar post bottom w/ point. FND. Remains of 18"± WPS w/ hack marks being a GLO BT. Measure N. 91'± (92.4' GLO) to S. edge of stream East to West. Accept bottom 5" post as corner monument & set 1"x8' long Galv. Iron Pipe w/ 4" DNR Alum. Cap in it's place. Reset 5" post on N. side, 3" post on E. side & 4" post on S. side of DNR Mon. as memorials. Reset steel fence post 1' N. DNR Monument accepted as a careful & faithful perpetuation of the position of the original corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

C-2 – 1"x8' long Galv. Iron Pipe w/ 4" DNR Alum. Cap. Set blue Carsonite post 1' W. S80°W 7.23' to set N&T in face 18'± W. Pine Stp. (GLO)
S66°W 6.60' to fnd. nail in NW. Side 8" Cedar – FND. marked '1/4' (RMH)
N49°W 8.04' to fnd.nail in NE. Side 9" Cedar – FND. marked '1/4' (RMH)
N82°E 15.95' to fnd. nail in S. Side 8" Spruce (RMH)
S 3°E 30.71' to set N&T in E. Side 8" Tamarack - scribed 'XBT'
N56°W 56.83' to set N&T in NE. Side 15" W. Pine – scribed 'XBT'



Signed by Craig W. McVean
 Surveyor's Michigan License No. 39088

Date 8/27/2002