

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in

| | | |
|------------------------------------|-------------|----------------|
| --- Cass | Located In: | Corner Code // |
| (County) | | |
| 1. Public Land Survey | T 7S R 13W | M-5 <i>M-1</i> |
| | T R | |
| | T R | |
| | T R | |
| 2. Property Controlling in Section | S T R | |
| | S T R | |
| 3. Miscellaneous Property in Sec. | S T R | |
| | S T R | |
| 4. Lot No., Recorded Plat | | |
| 5. Private Claims | | |

Register of Deeds Stamp & File Number

| | | | | | | | | | | | | | |
|----|----|---|----|---|----|---|----|---|----|---|----|---|---|
| | A | B | C | D | E | F | G | H | I | J | K | L | M |
| 2 | 6 | | 5 | | 4 | | 3 | | 2 | | 1 | | |
| 3 | | | | | | | | | | | | | |
| 4 | 7 | | 8 | | 9 | | 10 | | 11 | | 12 | | |
| 5 | | | | | | | | | | | | | |
| 6 | 18 | | 17 | | 16 | | 15 | | 14 | | 13 | | |
| 7 | | | | | | | | | | | | | |
| 8 | 19 | | 20 | | 21 | | 22 | | 23 | | 24 | | |
| 9 | | | | | | | | | | | | | |
| 10 | 30 | | 29 | | 28 | | 27 | | 26 | | 25 | | |
| 11 | | | | | | | | | | | | | |
| 12 | 31 | | 32 | | 33 | | 34 | | 35 | | 36 | | |
| 13 | | | | | | | | | | | | | |

I, Donald L. Bissell, in a field survey on October, 19 89, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law, established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

| | |
|----------------------------------|------------------------------|
| M-5 SE Cor. Sec. 12 | M-4 E 1/4 Cor. Sec. 12 |
| 10" W. Oak - S12 3/4°W - 48 Lks. | 9" W. Oak 1/4 Section Corner |
| 15" W. Oak - N 9°W - 47 Lks. | |


B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

| | |
|----------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| M-5 SE Cor. Sec. 12 | M-4 E 1/4 Cor. Sec. 12 |
| Found Old Rotted Stake and Rotted Remains of Trees at Location of Original Witnesses. | Set 1/2" Rod in Center of 26" Hollow Stump. Original 1/4 Corner. Stump Deteriorated and Fall Apart. |
| Set 4" x 36" Conc. Mon. w/Alum. Cap in Place of Rotted Stake. In Old North-South Fence Line. | |

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

| | |
|-------------------------------|--------------------------------------------|
| M-5 SE Cor. Sec. 12 | M-4 E 1/4 Cor. Sec. 12 |
| N29°E - 27.30' - 6" Hickory | N5°E - 42.41' - 22" Sassafrass |
| S17°E - 21.06' - 4" Hickory | S78°E - 7.45' - Power Pole |
| N69°W - 31.63' - 6" W. Oak | S40° E - 39.23' - R. Oak |
| N36°W - 20.60' - 20" R. Oak | South - 20.80' - 5" Cherry, in North Trunk |
| S4°W - 76.50' - 4" Conc. Mon. | |

Signed by Donald L. Bissell
 Surveyor's Michigan License No. 18655

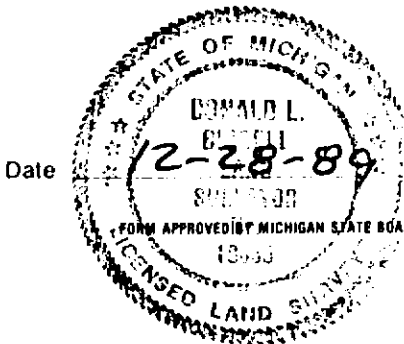

Date 12-28-89