

MAR 09 1994

COMMISSION

Chippewa County Remonumentation

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

RECEIVED FOR RECORD
CHIPPEWA COUNTY
STATE OF MICHIGAN

93 DEC 29 AM 10:27

J. Roger Mallett
REGISTER OF DEEDS

For corners in

Chippewa (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>45N</u> R <u>1E</u>	<u>I-4</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
4. Lot No. _____, Recorded Plat _____		
5. Private Claims _____		

Register of Deeds Stamp & File Number

I, William L. Karr in a field survey on October 21, 1992, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

(I-4) West 1/4 Corner Section 11

1845: Corner established by J.H. Mullett
Ties in County Surveyor Corner Book
12" Cedar N52°E 10 links
12" Hemlock S69°W 06 links

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

(I-4) West 1/4 Corner Section 11


Found no evidence of corner position.
Set corner midway and on line between
the NW and SW Section Corners.

This corner is being perpetuated as part of the
Chippewa County Remonumentation Program.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

(I-4) West 1/4 Corner Section 11

Corner is a 1/2"x 24" iron with cap no. 27450.
8" Spruce N85°W 84.69'
Fence Post N80°E 55.35'
Fence Post S75°E 54.66'
PP (DR1/76F/1) S18°W 135.52'

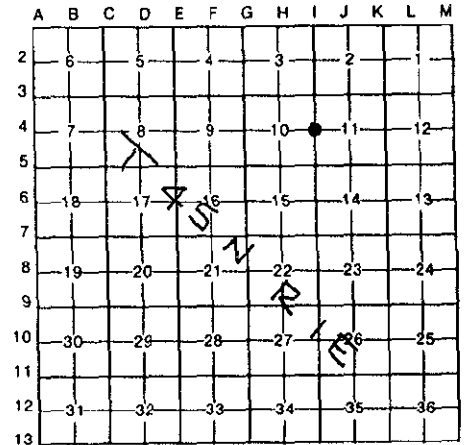

1566-00

Signed by William L. Karr Date 3/9/93

Surveyor's Michigan License No. 27450

NOTE: All bearings are compass bearings corrected for declination. All distances are to a nail in side of witness objects unless otherwise noted.