

LAND CORNER RECORDATION CERTIFICATE  
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in  
Chippewa  
(County)

Located In: Corner Code #

RECEIVED FOR RECORD  
CHIPPEWA COUNTY  
STATE OF MICHIGAN

94 JUL 22 AM 11:17


*J. Roger Mallett*  
REGISTER OF DEEDS

Register of Deeds Stamp & File Number

1. Public Land Survey	T <u>46N</u> R <u>1E</u>	<u>G-3</u>
	T <u>46N</u> R <u>1E</u>	<u>H-3</u>
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

4. Lot No. \_\_\_\_\_, Recorded Plat \_\_\_\_\_  
5. Private Claims \_\_\_\_\_

I, William L. Karr, in a field survey on DECEMBER 1, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

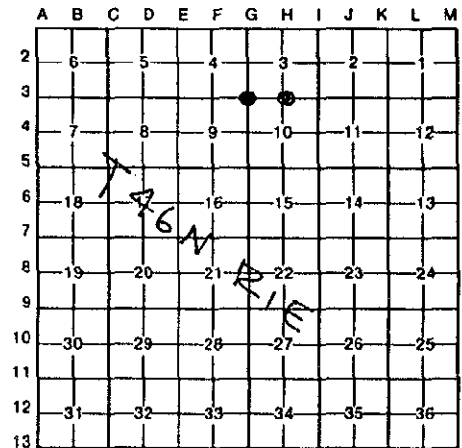

NOTE: Not more than 4 corners; all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

<u>(G-3) Sec Cor. of Sec. 3, 4, 9, 10 (T46N-R1E)</u> <u>1971: Chippewa Co. Road Comm. L. 3, P. 124 of Corner Records. Con. mon &amp; 3/4" pipe.</u> <u>1991: L.E. Weinreis found 3/4" iron &amp; accepted (Liber 7, Page 326).</u>	<u>(H-3) 1/2 Cor Common to Sec. 3 &amp; 10 (T46N-R1E)</u> <u>1845: Corner established by J.H. Mullett</u> <u>1991: L.E. Weinreis set 1/2" iron with cap #32343 (Liber 7, Page 326)</u>
8" Spruce N46°E 79.24'	Power Pole (DR1/136A/7) N11°E 42.13'
Power Pole (DR1/36A/23) N47°E 50.75'	20" Burr Oak N75°E 111.37'
Anchor Pole S45E 49.51'	20" White Pine S41°E 58.04'
8" Spruce S27°W 94.77'	Power Pole S50°W 48.55'
Corner Fence Post N30°W 59.33'	Southwest Corner of House Foundation N41°W 113.81'

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

<u>(G-3) Found corner and accessories as recorded in Liber 7, Page 326 of Chippewa County Records. Accepted corner position as found.</u>	<u>(H-3) Found corner and accessories as recorded in Liber 7, Page 326 of the Chippewa County Records. Accepted corner position as found.</u>
---	---

SURVEY &  
REMONUMENTATION

JUL 26 1994

COMMISSION



C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

<u>(G-3) Corner is a 3/4" iron. Falls in the approximate intersecting centerlines of 7 Mile Road and Ridge Road (gravel roads).</u>	<u>(H-3) Corner is 1/2" iron with #32343 cap. Falls in approximate centerline of 7 Mile Road (gravel) on the extension of a fence line to the South.</u>
---	--

Ties:

8" Spruce	N46°E	79.24'
Power Pole (DR1/36A/23)	N47°E	50.75'
Anchor Pole	S45E	49.51'
8" Spruce	S27°W	94.77'
Corner Fence Post	N30°W	59.33'

Ties:

Power Pole (DR1/136A/7)	N11°E	42.13'
20" Burr Oak	N75°E	111.37'
20" White Pine	S41°E	58.04'
Power Pole	S50°W	48.55'
Southwest Corner of House Foundation	N41°W	113.81'

Signed by William L. Karr  
Surveyor's Michigan License No. 27450

Date 7/21/94

NOTE: Bearings are compass bearings corrected for declination.  
Distances are to a nail in side of witness objects unless noted.