

RECORD

1898

SECTION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970
Chippewa County Remonumentation Corner

For corners in

Chippewa County Located In: Corner Code #
1. Public Land Survey T 46N R 2E F-5
2. Property Controlling in Section S T R
3. Miscellaneous Property in Sec. S T R
4. Lot No. Recorded Plat
5. Private Claims

\$7.00 LAND CORNER
\$2.00 MSSR
21 JAN 1999 10:17:45 AM Receipt #13123
RECEIVED FOR RECORD
CHIPPEWA COUNTY - STATE OF MICHIGAN
SHARON H. KENNEDY, REGISTER OF DEEDS
BOOK 10 PAGE 340
Register of Deeds Stamp & File Number

I, Larry R. Rogers in a field survey on October 15, 1998, do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:



NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

Grid table with columns A-M and rows 1-13. Contains handwritten numbers and symbols, including a dot in cell F5 and 'E' in cell J4.

A. Description of original monument and accessories and/or subsequent restoration:
(F-5) 1/4 Corner Common to Sections 9 and 16, Township 46 North, Range 2 East.
The original corner was placed in 1845 by James H. Mullett. County Surveyor records make no specific reference to this corner. In 1982, William L. Karr, P.S. 27450 found no evidence of corner position and re-established the corner midway and on-line between Northeast and Northwest corners of Section 16. Karr filed a L.C.R.C. in Liber 6, Page 360 of the Chippewa County Corner Records.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
(F-5) 1/4 Corner Common to Sections 9 and 16, Township 46 North, Range 2 East.
This corner is being perpetuated as part of the Chippewa County Remonumentation Program. Found a 1" drill rod set by Karr, 0.2 feet below grade and 1.6 feet South of centerline of 8 Mile Road (East-West, gravel) and on the extension of a brush line to North. Accepted corner position as found. Distance to Northwest Corner of Section 16 is 2664.40 feet and distance to Northeast Corner of Section 16 is 2663.80 feet.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
(F-5) 1/4 Corner Common to Sections 9 and 16, Township 46 North, Range 2 East.
Corner is a 1" x 36" drill rod 0.2 feet below grade and 1.6 feet South of centerline of 8 Mile Road.

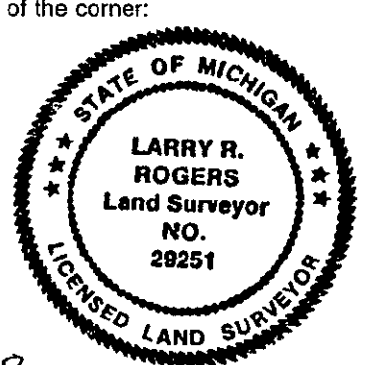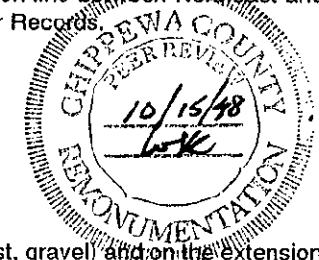

Witnesses:
8" Spruce N06°E 55.91 feet
6" Maple N26°W 88.35 feet
14" White Birch S26°W 39.40 feet
Twin 11" White Birch S14°E 44.64 feet
1/2" iron pin with cap 27450 South 33.0 feet

Signed by [Signature] Date 30 DEC 1998

Surveyor's Michigan License No. 29251

NOTE: All bearings are compass bearings corrected for declination (6°W). All distances are to a nail and tag in the side of witness object unless otherwise noted.

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983
REVISED OCT., 1995