

MAR 27 1996

CHIPPEWA COUNTY REMONUMENTATION CORNER

COMMISSION LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in


<u>Chippewa</u> (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>47</u> N R <u>1E</u>	<u>D-11</u>
	T <u> </u> R <u> </u>	<u> </u>
	T <u> </u> R <u> </u>	<u> </u>
	T <u> </u> R <u> </u>	<u> </u>
2. Property Controlling in Section	S <u> </u> T <u> </u> R <u> </u>	<u> </u>
	S <u> </u> T <u> </u> R <u> </u>	<u> </u>
3. Miscellaneous Property in Sec.	S <u> </u> T <u> </u> R <u> </u>	<u> </u>
	S <u> </u> T <u> </u> R <u> </u>	<u> </u>

\$ 7.00 LAND CORNER
 \$ 2.00 MSSR
 29 FEB 96 9:39 A.H. RECEIPT# 462
 RECEIVED FOR RECORD
 CHIPPEWA COUNTY - STATE OF MICHIGAN
 SHARON H. KENNEDY, REGISTER OF DEEDS

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

I, William L. Karr, in a field survey on Dec. 8, 1995 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

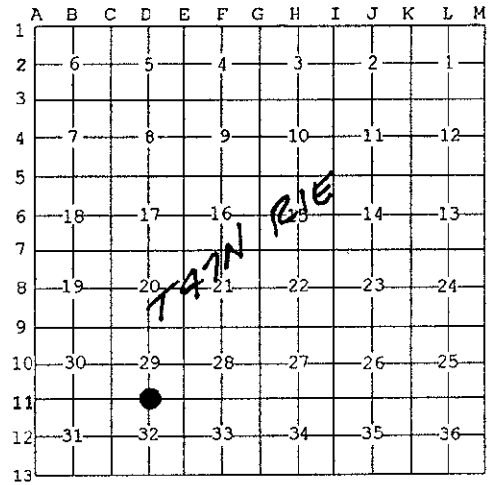

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.


A. Description of original monument and accessories and/or subsequent restoration:
(D-11) 1/4 Corner common to Sections 29 and 32, T47N, R1E
1845: James H. Millette set post
 Witnesses: Cedar 10" N50°W 10 links
 Birch 8" S48°E 8 links
1990: K.R. Waters, P.S. 33142 re-established corner by single proportionate measurement.
 Corner is recorded in Liber 7, Page 248.

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
(D-11) This corner is being perpetuated as part of the Chippewa County Remonumentation program.

Found corner and all witnesses as described in 1990. Accepted corner position as found.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
(D-11) Found 1/2" iron with cap No. 33142 in centerline of 5 Mile Road.

Witnesses: Power Pole N70°E 145.83' (existing)
 Telephone Box S68°E 137.30' (existing)
 Fence Post South 50.28' (existing)
 Power Pole N67°W 133.36' (existing)



Signed by William L. Karr
 Surveyor's Michigan License No. 27450

Date 12/15/95

NOTE: Bearings are compass bearings corrected for declination. Distances are to a nail in side of witness objects unless noted. FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
 REVISED MAY 14, 1975
 REVISED JAN. 1983
 REVISED OCT., 1995