


# LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. PA 1970

For Corners In: <u>Clare</u> (County)	Located In _____	Corner Code # _____
1. Public Land Survey	T <u>17N</u> R <u>5W</u>	<u>H12</u>
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

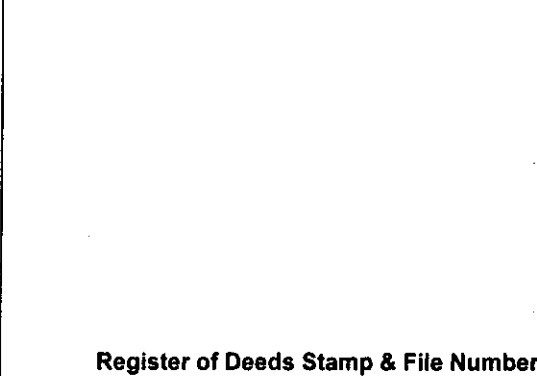

**Register of Deeds Stamp & File Number**

4. Lot No: \_\_\_\_\_ Recorded Plat: \_\_\_\_\_

5. Private Claims: \_\_\_\_\_

I, Craig W. McVean, in a field survey on July 17, 2000 do hereby state that under requirements of PA 74, Michigan PA of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6	5	4	3	2	1							
3													
4	7	8	9	10	11	12							
5													
6	18	17	16	15	14	13							
7													
8	19	20	21	22	23	24							
9													
10	30	29	28	27	26	25							
11													
12	31	32	33	34	35	36							
13													

**NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:  
H12-Rec. Sur. L.2, P.203-M. McClung-1975  
 Fd. corner by Lapham & Assoc.

B. Description of corner evidence found and/or method applies in restoring or re-establishing corner:  
H12- Center 1/4, Sec. 34-Fd. 1/2" x 18" capped Rebar #9433-1.35' S & 0.01' E of calculated 1/4 line intersection. CL of 2 track is 10' SE'ly. Barbwire fence diagonal is 50'+ SE'ly. CIR #9433 accepted as the best available evidence of the position of the corner.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:  
H12-Replaced 1/2" x 18" CIR #9433 w/ 3 1/2" DNR Alum. Cap on 1" x 36" Galv. Iron Pipe. Set Blue Carsonite Post 1' NW  
 N42°W 23.10' to N&T in SW side 7" R. Oak scribed 'XBT'  
 N33°E 16.62' to N&T in W side 3" R. Oak scribed 'XBT'  
 N67°E 47.54' to N&T in NW side 6" R. Maple scribed 'XBT'  
 S12°W 77.25' to N&T in E side 6" R. Pine scribed 'XBT'

DNR Mon. used & accepted in place of Clare Co. Remon. Mon.



Signed by: Craig W. McVean  
 Surveyor's Michigan License No.: 39088

Date: 10/18/2000