

FEB 18 1994

COMMISSION

CLARE COUNTY REMONUMENTATION PROGRAM

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

RECEIVED
 E O I O A O
 1993 DEC 20 PM 1:46
 REGISTER OF DEEDS
 CLARE COUNTY
 DONNA M. CARR

For corners in

CLARE (County)	Located In:	Corner Code #
1. Public Land Survey	T <u>17N</u> R <u>4W</u>	<u>C-8</u>
	T _____ R _____	_____
	T _____ R _____	_____
	T _____ R _____	_____
2. Property Controlling in Section	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____
3. Miscellaneous Property in Sec.	S _____ T _____ R _____	_____
	S _____ T _____ R _____	_____

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

I, MARK R. ROBISON in a field survey on OCTOBER, 19 93, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:


NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

- A. Description of original monument and accessories and/or subsequent restoration:
 1850 W.A. BURT, BEECH 12" S 25-1/2°W 44 LKS
 W. PINE 28" N 05°E 12 LKS
 6-23-94 UNIDENTIFIED, CSR 5-171
 4-28-00 A. JOHNSON, CSR 1-3
 5-1-72 P. LAPHAM, LCRC 23-72
 10-10-72 J. SEDGMAN, (132) 1-364
 9-27-84 P. LAPHAM, LCRC 464-85

- B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
 Found 1/2" x 18" iron in asphalt and capped iron 32.3' West. Set temporary point 0.7' East of iron. Temporary point fits recorded surveys by McClung dated 6-25-71, i.e. Angle measured 180°23' on East side of Section line, distance North to Section Corner measured 2638.24' (Recorded 2638.73') and distance South to Section Corner measures 2638.44' (Recorded 2638.73'). Set Corner 0.7' East of 1/2" x 18" iron. Removed iron.
 FOUND RECORDED WITNESSES:
 S 29°W, 79.26' - POWER POLE
 N 51°E, 61.15' - POWER POLE
 N 63°E, 124.61' - S.W. COR. HSE.
 WEST, 33.00' - CAPPED RE-ROD

This Corner established in Clare County Remonumentation Program.
 See dossier for detailed report.

- C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
 SET 5/8" X 36" RE-ROD WITH 3" CLARE COUNTY MONUMENT CAP.
 WEST, 33.00' - CAPPED RE-ROD
 N 45°E, 60.67' - POWER POLE
 N 45°W, 82.5' - OAK
 S 30°W, 79.48' - POWER POLE

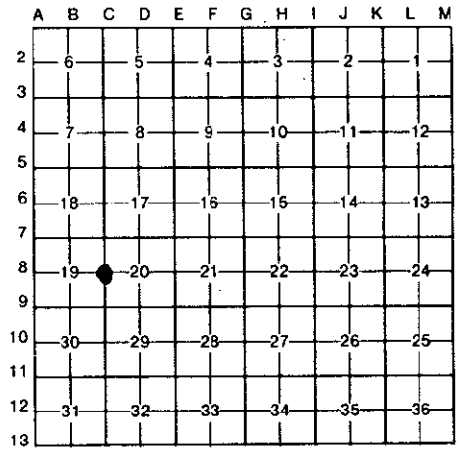

Signed by Mark R. Robison Date 11/24/93
 Surveyor's Michigan License No. 27458