

SURVEY & REMONUMENTATION

DEC 07 1994

COMMISSION

LAND CORNER RECORDATION CERTIFICATE
Filing Requirement of Act 74, Mich. P.A. 1970

RECORDED

For corners in
Clinton
 (County)

Located In: Corner Code ##

- | | | | | | |
|------------------------------------|---|-----------|---|-----------|-----------------|
| 1. Public Land Survey | T | <u>5N</u> | R | <u>2W</u> | <u>A-1, A-5</u> |
| | T | | R | | |
| | T | | R | | |
| | T | | R | | |
| 2. Property Controlling in Section | S | | T | R | |
| | S | | T | R | |
| 3. Miscellaneous Property in Sec. | S | | T | R | |
| | S | | T | R | |

MAR 15 3 37 PM '94

REGISTER OF DEEDS
 CLINTON COUNTY, MICH.

Carol Wooley

LIBER 4, PAGE 15

Register of Deeds Stamp & File Number

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

I, Arden S. Pierson P.S., a field survey on October 21, 1993, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

	A	B	C	D	E	F	G	H	I	J	K	L	M
2		6		5		4		3		2		1	
3													
4		7		8		9		10		11		12	
5													
6		18		17		16		15		14		13	
7													
8		19		20		21		22		23		24	
9													
10		30		29		28		27		26		25	
11													
12		31		32		33		34		35		36	
13													

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:

- A-1 - Original survey by Harvey Parke, D.S. in 1827 no County Surveyor Records on this Corner. Consumer Power Company Records indicate set rebar & cap at Township Corner from surveys in adjoining Sections.
- A-5 - Original survey by Harvey Parke D.S. in 1827 recorded corner in Liber 1, page 147 dated 8/09/71

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

Dewitt Township

- A-1 (NW corner-Section 6) - Intersection Airport & Cutler Road - Found 1/2" rod & cap set by Consumer Power. Accepted rod as corner and set- Standard Clinton County Monument in monument box.
- A-5 (SW corner-Section 7) - Intersection Airport & Herbison Road - Found 1/2" rod in monument box and excavated below - Found pointed stone buried 30"- Left stone and raised with Standard Clinton County Monument and replaced monument box.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

A-1 (NW corner-Section 6)
 (Standard Clinton County Monument in monument box)

N & T SE side 28" Ash -S57°W- 50.45'
 Consumers tag in E. side tel. pole -N37°W- 40.60'
 Center of manhole cover -N59°W- 42.28'
 N & T NE side power pole -S23°E- 175.41'


A-5 (SW corner-Section 7)
 (Standard Clinton County Monument in monument box)

N & T in NE side telephone pole -N40°W- 45.65'
 N & T in SE side telephone pole -N62°E- 39.11'
 NE corner house foundation -S40°E- 139.05'
 NW corner foundation North house addition -S44°E- 122.78'
 Corner M-5 - T5N, R3W -South- 16.86

**Standard Clinton County Monument is a 2" steel tube, 30" long with a 3 1/2" breakaway magnetic base and stamped brass cap.

Signed by Arden S. Pierson Date November 24, 1993
 Surveyor's Michigan License No. 13039

APPROVED BY
 CLINTON COUNTY PEER GROUP
 DATED 12/8/93
J. J. J.

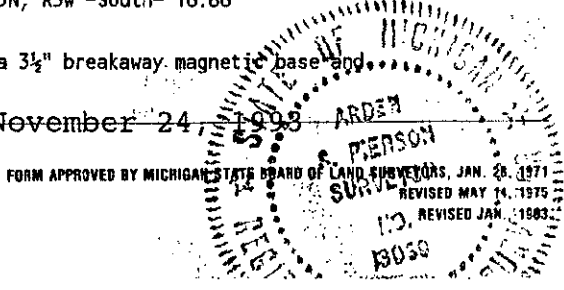

FORM APPROVED BY MICHIGAN STATE BOARD OF LAND SURVEYORS, JAN. 28, 1971
 REVISED MAY 14, 1975
 REVISED JAN. 1983