

SURVEY & REMONUMENTATION

APR 07 1998

LAND CORNER RECORDATION CERTIFICATE
 Filing Requirement of Act 74, Mich. P.A. 1970


SECTION
 For corners in

Crawford Located In: Corner Code #
 (County)

1. Public Land Survey T 26NR 4W H-13
 T 25N R 4W H-1
 T R
 T R

2. Property Controlling S T R
 in Section S T R

3. Miscellaneous S T R
 Property in Sec. S T R

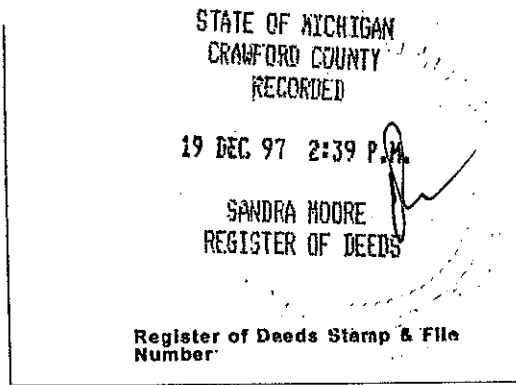

LIBER 3 PAGE 297

4. Lot No. _____, Recorded Plat _____
 5. Private Claims _____

	A	B	C	D	E	F	G	H	I	J	K	L	M
1													
2	6		5		4		3		2		1		
3													
4	7		8		9		10		11		12		
5													
6	18		17		16		15		14		13		
7													
8	19		20		21		22		23		24		
9													
10	30		29		28		27		26		25		
11													
12	31		32		33		34		35		36		
13													

I, Marvin E. Myers, in a field survey on September, 1997 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:
 G.L.O.
 April 16, 1839
 H. Brevoort D.S. &
 James H. Mullet D.S.
 Mon: Post
 Wit: 20" Yellow Pine N57°E 48 links
 18" Yellow Pine N35°W 10 links

CRAWFORD COUNTY
PEER GROUP APPROVAL
DATE Oct 16, 1997
Marvin E. Myers P.S.
Marvin E. Myers, P.S.
County Surveyor

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:
 Found 1 1/2" pipe in the centerline of a North - South trail and 9' South and 10' West of a fence line East
 Found blaze in Northwest face of a 14" Birch S27°E 23'
 Found blaze in Northwest face of a 20" Beech set nail and tag in East face S29°E 54.76'
 Replaced 1 1/2" Pipe with Standard Crawford County Monument. Accepted position as the best available evidence of the position of the Original Corner. Said 1 1/2" pipe is typical of material found at other Delamater corners of record in the vicinity. I believe this corner was set by Delamater.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:
 Mon - Standard Crawford County Monument.
 Set nail and tag in Northwest corner of railroad tie fence corner post S59°E
 Set nail and tag in West face 12" Maple N28°E 45.49'
 Set nail and tag in North face 8" Poplar N75°W 13.85'
 Set Carsonite Post East 11.52'

Signed by *Marvin E. Myers*
 Surveyor's Michigan License No. 31600

Date Dec 8, 1997
31600

